



IMB-1001

User Manual

Version 1.0

Published April 2019

Copyright©2019 ASRock INC. All rights reserved.

---

Version 1.0

Published April 2019

Copyright©2019 ASRock INC. All rights reserved.

### Copyright Notice:

No part of this documentation may be reproduced, transcribed, transmitted, or translated in any language, in any form or by any means, except duplication of documentation by the purchaser for backup purpose, without written consent of ASRock Inc.

Products and corporate names appearing in this documentation may or may not be registered trademarks or copyrights of their respective companies, and are used only for identification or explanation and to the owners' benefit, without intent to infringe.

### Disclaimer:

Specifications and information contained in this documentation are furnished for informational use only and subject to change without notice, and should not be construed as a commitment by ASRock. ASRock assumes no responsibility for any errors or omissions that may appear in this documentation.

With respect to the contents of this documentation, ASRock does not provide warranty of any kind, either expressed or implied, including but not limited to the implied warranties or conditions of merchantability or fitness for a particular purpose.

In no event shall ASRock, its directors, officers, employees, or agents be liable for any indirect, special, incidental, or consequential damages (including damages for loss of profits, loss of business, loss of data, interruption of business and the like), even if ASRock has been advised of the possibility of such damages arising from any defect or error in the documentation or product.



This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

### CALIFORNIA, USA ONLY

The Lithium battery adopted on this motherboard contains Perchlorate, a toxic substance controlled in Perchlorate Best Management Practices (BMP) regulations passed by the California Legislature. When you discard the Lithium battery in California, USA, please follow the related regulations in advance.

“Perchlorate Material-special handling may apply, see [www.dtsc.ca.gov/hazardouswaste/perchlorate](http://www.dtsc.ca.gov/hazardouswaste/perchlorate)”

**ASRock Website:** <http://www.asrock.com>

---

The terms HDMI® and HDMI High-Definition Multimedia Interface, and the HDMI logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.



**CAUTION:**

RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE.  
DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS.

---

# Contents

<b>1 Introduction .....</b>	<b>5</b>
1.1 Package Contents .....	5
1.2 Specifications.....	6
1.3 Motherboard Layout.....	8
1.4 I/O Panel.....	10
<b>2 Installation .....</b>	<b>11</b>
2.1 Screw Holes.....	11
2.2 Pre-installation Precautions .....	11
2.3 Installation of Memory Modules (SO-DIMM).....	12
2.4 Expansion Slot.....	13
2.5 Jumpers Setup.....	14
2.6 Onboard Headers and Connectors.....	17
<b>3 UEFI SETUP UTILITY.....</b>	<b>23</b>
3.1 Introduction .....	23
3.1.1 UEFI Menu Bar .....	23
3.1.2 Navigation Keys .....	24
3.2 Main Screen.....	24
3.3 Advanced Screen.....	25
3.3.1 CPU Configuration .....	26
3.3.2 Chipset Configuration.....	27
3.3.3 Storage Configuration .....	29
3.3.4 Super IO Configuration .....	30
3.3.5 ACPI Configuration.....	31
3.3.6 USB Configuration .....	32
3.3.7 Trusted Computing.....	33
3.4 Hardware Health Event Monitoring Screen .....	34
3.5 Security Screen .....	35
3.6 Boot Screen .....	36
3.7 Exit Screen .....	38
<b>4 Software Support .....</b>	<b>39</b>
4.1 Install Operating System.....	39
4.2 Support CD Information .....	39
4.2.1 Running Support CD.....	39
4.2.2 Drivers Menu.....	39
4.2.3 Utilities Menu.....	39
4.2.4 Contact Information.....	39

---

# Chapter 1: Introduction

Thank you for purchasing ASRock **IMB-1001** motherboard, a reliable motherboard produced under ASRock's consistently stringent quality control. It delivers excellent performance with robust design conforming to ASRock's commitment to quality and endurance.

In this manual, chapter 1 and 2 contain introduction of the motherboard and step-by-step guide to the hardware installation. Chapter 3 and 4 contain the configuration guide to BIOS setup and information of the Support CD.



Because the motherboard specifications and the BIOS software might be updated, the content of this manual will be subject to change without notice. In case any modifications of this manual occur, the updated version will be available on ASRock website without further notice. You may find the latest VGA cards and CPU support lists on ASRock website as well. ASRock website <http://www.asrock.com>

If you require technical support related to this motherboard, please visit our website for specific information about the model you are using. [www.asrock.com/support/index.asp](http://www.asrock.com/support/index.asp)

## 1.1 Package Contents

ASRock **IMB-1001** Motherboard

(Mini-ITX Form Factor: 6.7-in x 6.7-in, 17.0 cm x 17.0 cm)

ASRock **IMB-1001** Driver CD

ASRock **IMB-1001** Jumper Setting Instruction


1 x I/O Panel Shield

## 1.2 Specifications

<b>Form Factor</b>	Dimensions	Mini-ITX (6.7-in x 6.7-in)
<b>Processor System</b>	CPU	Intel® Celeron® Processor J1900, QC, 2.00GHz, 10W
	Chipset	SoC
	BIOS	UEFI
<b>Expansion Slot</b>	PCIe	1 x PCIe x1 slot
	Mini-PCIe	1 x Full/Half size with PCIe x1 and USB 2.0
	mSATA	0
	M.2	1 x M.2 (Key M, 2242/2260/2280) with shared SATA2 for SSD
<b>Memory</b>	Technology	Single Channel DDR3L 1333 MHz
	Max.	8GB
	Socket	1 x SO-DIMM
<b>Graphics</b>	Controller	Integrated Intel® Gen7 Intel® Graphics DX 11, OGL3.2
	VGA	Supports max resolution up to 1920 x 1200@60Hz
	DVI	N/A
	LVDS	Dual Channel 24-bit, max resolution up to 1920 x 1200@60Hz
	HDMI	Supports max resolution up to 1920 x 1200
	DisplayPort	N/A
	MultiDisplay	Dual Display
<b>Ethernet</b>	Ethernet	10/100/1000 Mbps
	Controller	2 x Realtek RTL8111G
	Connector	2 x RJ-45
<b>Rear I/O</b>	VGA	1
	DVI	N/A
	HDMI	1
	DisplayPort	N/A
	Ethernet	2
	USB	3 x USB 2.0, 1 x USB3.1
	Audio	2 (Mic-in, Line-out)
	Serial	N/A
PS/2	N/A	

<b>Internal Connector</b>	USB	5 x USB 2.0 (2 x header, 1 x TypeA)
	LVDS/ Inverter	1/1
	VGA	1
	Serial	5 x COM (RS-232), 1 x COM (RS-232/422/485)
	SATA	2 x SATA2, one is shared with M.2 Key M
	Parallel	1 (shared with GPIO)
	GPIO 8-bit	8 x GPI, 8 x GPO
	SATA PWR Output Con	1
	Speaker Header	1
	TPM	1 x Header
<b>Watchdog Timer</b>	Output	Output from super I/O to drag RESETCON#
	Interval	256 Segments, 0,1,2...255 Sec/Min
<b>Power Requirements</b>	Input PWR	12V DC-in (DC Jack / 4-pin DC-in PWR Con)
	Power On	AT/ATX Supported -AT : Directly PWR on as power input ready -ATX : Press button to PWR on after power input ready
<b>Environment</b>	Temperature	0°C – 60°C
	Storage Temp	-40°C – 85°C

### 1.3 Motherboard Layout

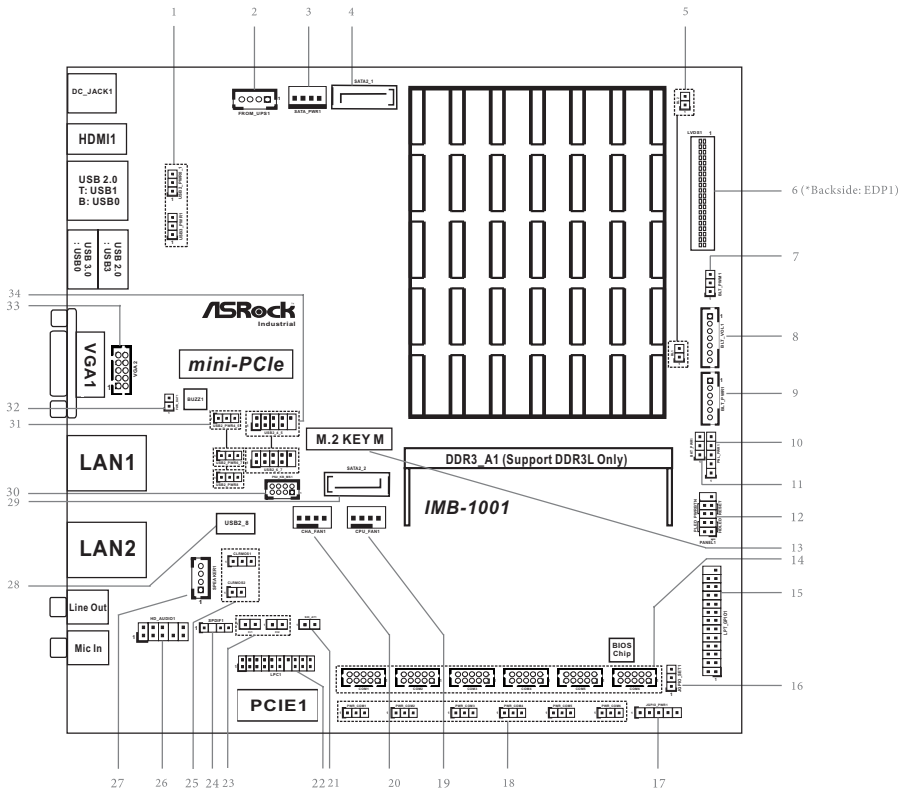




- 
- 1 : USB Power Setting Jumpers  
(USB3\_PWR1 (For USB3\_0\_USB2\_3))  
(USB2\_PWR0\_1 (For USB2\_0\_1))
  - 2 : 4-pin DC-in PWR Connector (Input +12V) & UPS Module Power Output Connector
  - 3 : SATA Power Output Connector
  - 4 : SATA2 Connector (SATA2\_1)
  - 5 : BL1, BL2
  - 6 : LVDS Panel Connector  
\* eDP Connector (Optional) (on the Backside of PCB)
  - 7 : Backlight Control Level (BLT\_PWM1)
  - 8 : Backlight Volume Control (BLT\_VOL1)
  - 9 : Backlight Power Connector (BLT\_PWR1)
  - 10 : Panel Power Select (LCD\_VCC) (PNL\_PWR1)
  - 11 : Backlight Power Select (LCD\_BLT\_VCC) (BKT\_PWR1)
  - 12 : System Panel Header
  - 13 : M.2 KEY M (M2)
  - 14 : Internal COM Port Headers  
COM3 (RS232/422/485)  
COM1, 2, 4, 5, 6 (RS232)
  - 15 : Printer Port / GPIO Header (LPT\_GPIO1)
  - 16 : Digital Input / Output Default Value Setting (JGPIO\_SET1)
  - 17 : Digital Input / Output Power Select (JGPIO\_PWR) (JGPIO\_PWR1)
  - 18 : COM Port Pin9 PWR Setting Jumpers  
PWR\_COM1 ~ 6 (For COM Port1 ~ 6)
  - 19 : 4-Pin CPU FAN Connector (+12V)
  - 20 : 4-Pin Chassis FAN Connector (+12V) (Optional)
  - 21 : SIO\_AT1
  - 22 : LPC Header
  - 23 : Chassis Intrusion Headers (CI1, CI2)
  - 24 : SPDIF Header
  - 25 : Clear CMOS Headers (CLRMOS1, CLRMOS2)
  - 26 : Front Panel Audio Header
  - 27 : 3W Audio AMP Output Wafer
  - 28 : USB2.Port (USB2\_8)
  - 29 : SATA2 Connector (SATA2\_2) (Shared with M.2 KEY M (M2))
  - 30 : PS2 Keyboard/Mouse Header
  - 31 : USB Power Setting Jumpers  
(USB2\_PWR4\_5 (For USB2\_4\_5))  
(USB2\_PWR6\_7 (For USB2\_6\_7))  
(USB2\_PWR8 (For USB2\_8))
  - 32 : PWR\_BAT1
  - 33 : VGA Header (VGA2)
  - 34 : USB2.0 Connectors (USB2\_4\_5, USB2\_6\_7)
-

---

## 1.4 I/O Panel

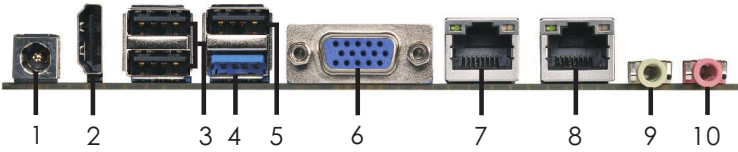


- |   |                          |    |                        |
|---|--------------------------|----|------------------------|
| 1 | DC Jack                  | 6  | VGA Port (VGA1)        |
| 2 | HDMI Port (HDMI1)        | 7  | LAN RJ-45 Port (LAN1)* |
| 3 | USB 2.0 Ports (USB2_0_1) | 8  | LAN RJ-45 Port (LAN2)* |
| 4 | USB 3.0 Port (USB3_0)    | 9  | Line out (Green)       |
| 5 | USB 2.0 Port (USB2_3)    | 10 | Microphone (Pink)      |

\* There are two LED next to the LAN port. Please refer to the table below for the LAN port LED indications.

### LAN Port LED Indications

Activity/Link LED	
Status	Description
Off	No Link
Blinking	Data Activity
On	Link

SPEED LED	
Status	Description
Off	10Mbps connection
Orange	100Mbps connection
Green	1Gbps connection



---

## Chapter 2: Installation

This is a Mini-ITX form factor (6.7" x 6.7", 17.0 x 17.0 cm) motherboard. Before you install the motherboard, study the configuration of your chassis to ensure that the motherboard fits into it.



Make sure to unplug the power cord before installing or removing the motherboard. Failure to do so may cause physical injuries to you and damages to motherboard components.

### 2.1 Screw Holes

Place screws into the holes to secure the motherboard to the chassis.



Do not over-tighten the screws! Doing so may damage the motherboard.

### 2.2 Pre-installation Precautions

Take note of the following precautions before you install motherboard components or change any motherboard settings.

1. Unplug the power cord from the wall socket before touching any component.
2. To avoid damaging the motherboard components due to static electricity, NEVER place your motherboard directly on the carpet or the like. Also remember to use a grounded wrist strap or touch a safety grounded object before you handle components.
3. Hold components by the edges and do not touch the ICs.
4. Whenever you uninstall any component, place it on a grounded antistatic pad or in the bag that comes with the component.



Before you install or remove any component, ensure that the power is switched off or the power cord is detached from the power supply. Failure to do so may cause severe damage to the motherboard, peripherals, and/or components.

---

## 2.3 Installation of Memory Modules (SO-DIMM)


**IMB-1001** motherboard provides one 204-pin DDR3 (Double Data Rate 3) SO-DIMM slot, which supports Single Channel DDR3L (low voltage).



1. It is not allowed to install a DDR or DDR2 memory module into a DDR3 slot; otherwise, this motherboard and SO-DIMM may be damaged.
2. Please make sure to disconnect the power supply before adding or removing SO-DIMMs or the system components.
3. The SO-DIMM only fits in one correct orientation. It will cause permanent damage to the motherboard and the SO-DIMM if you force the SO-DIMM into the slot at incorrect orientation.

### Installing a SO-DIMM

Step 1. Align a SO-DIMM on the slot such that the notch on the SO-DIMM matches the break on the slot.

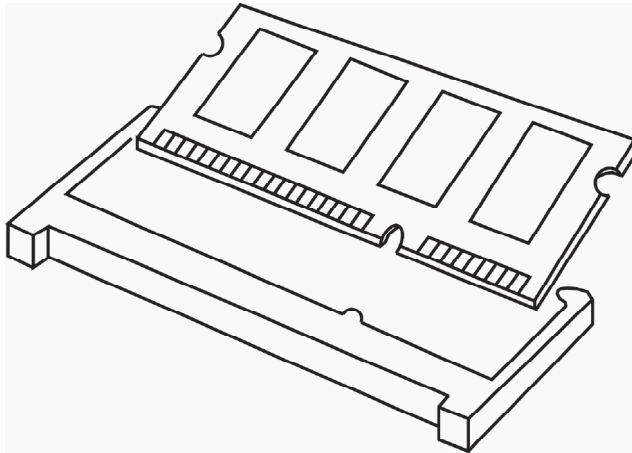

Step 2. Firmly insert the SO-DIMM into the slot until the retaining clips at both ends fully snap back in place and the SO-DIMM is properly seated.

## 2.4 Expansion Slots (mini-PCIe, PCI Express and M.2 Slots)

There is 1 mini-PCIe slot, 1 PCI Express slot and 2 M.2 slots on this motherboard.

### mini-PCIe slot:

MINI\_PCIE1 (mini-PCIe slot; half/full size) is used for PCI Express mini cards.

**PCIe slot:** PCIe1 (PCIe x1 slot) is used for PCI Express x1 lane width cards.

**M.2 slots:** M2 Slot (Key M) supports type 2242/2260/2280 M.2 SATA2 3.0 Gb/s module. (Shared with SATA2\_2)

Pin#	Signal#	Signal#	Pin#
1#	GND#	+3.3V#	2#
3#	GND#	+3.3V#	4#
5#	NA#	NA#	6#
7#	NA#	NA#	8#
9#	GND#	NA	10#
11#	NA#	+3.3V#	12#
13#	NA#	+3.3V#	14#
15#	GND#	+3.3V#	16#
17#	NA#	+3.3V#	18#
19#	NA#	NA#	20#
21#	GND#	NA#	22#
23#	NA#	NA#	24#
25#	NA#	NA#	26#
27#	GND#	NA#	28#
29#	NA#	NA#	30#
31#	NA#	NA#	32#
33#	GND#	NA#	34#
35#	NA#	NA#	36#
37#	NA#	NA	38#
39#	GND#	SMB_CLK#	40#
41#	BATA_RX	SMB_DATA#	42#
43#	SATA_RX#B	NA#	44#
45#	GND#	NA#	46#
47#	SATA_TX#B	NA#	48#
49#	BATA_TX	NA	50#
51#	GND#	NA	52#
53#	NA	NA	54#
55#	NA	NA#	56#
57#	GND#	NA#	58#
#			
67#	NA#	NA	68#
69#	GR#	+3.3V#	70#
71#	GND#	+3.3V#	72#
73#	GND#	+3.3V#	74#
75#	GND#	#	#


## Installing an expansion card

- Step 1. Before installing the expansion card, please make sure that the power supply is switched off or the power cord is unplugged. Please read the documentation of the expansion card and make necessary hardware settings for the card before you start the installation.
- Step 2. Remove the system unit cover (if your motherboard is already installed in a chassis).
- Step 3. Remove the bracket facing the slot that you intend to use. Keep the screws for later use.
- Step 4. Align the card connector with the slot and press firmly until the card is completely seated on the slot.
- Step 5. Fasten the card to the chassis with screws.
- Step 6. Replace the system cover.

---

## 2.5 Jumpers Setup

The illustration shows how jumpers are setup. When the jumper cap is placed on pins, the jumper is “Short”. If no jumper cap is placed on pins, the jumper is “Open”. The illustration shows a 3-pin jumper whose pin1 and pin2 are “Short” when jumper cap is placed on these 2 pins.



---

Clear CMOS Jumper  
(2-pin CLRMOS2)  
(see p.8, No. 25)



Open: Normal  
Short: Auto Clear CMOS (Power Off)

**Note:** CLRMOS2 allows you to clear the data in CMOS automatically when AC power on. The data in CMOS includes system setup information such as system password, date, time, and system setup parameters. To clear and reset the system parameters to default setup, please turn off the computer and unplug the power cord, then use a jumper cap to short the pins on CLRMOS2.

---

Clear CMOS Jumper  
(3-pin CLRMOS1)  
(see p.8, No. 25)



**Note:** CLRMOS1 allows you to clear the data in CMOS. To clear and reset the system parameters to default setup, please turn off the computer and unplug the power cord from the power supply. After waiting for 15 seconds, use a jumper cap to short pin2 and pin3 on CLRMOS1 for 5 seconds. However, please do not clear the CMOS right after you update the BIOS. If you need to clear the CMOS when you just finish updating the BIOS, you must boot up the system first, and then shut it down before you do the clear-CMOS action. Please be noted that the password, date, time, user default profile and MAC address will be cleared only if the CMOS battery is removed.

---

Digital Input / Output Power Select  
(5-pin JGPIO\_PWR1)  
(see p.8 No. 17)



1-2: +12V  
2-3: +5V  
4-5: GND

---

### Panel Power Select (LCD\_VCC)

(5-pin PNL\_PWR1)

(see p.8 No. 10)



Use this to set up the VDD power of the LVDS connector.

1-2: LCD\_VCC: +3V

2-3: LCD\_VCC: +5V

4-5: LCD\_VCC: +12V

---

### Backlight Power Select (LCD\_BLT\_VCC)

(3-pin BKT\_PWR1)

(see p.8 No. 11)



Use this to set up the backlight power of the LVDS connector and the panel backlight power of BLT\_PWM1.

1-2: LCD\_BLT\_VCC: +5V

2-3: LCD\_BLT\_VCC: +12V

---

### Backlight Control Level

(3-pin BLT\_PWM1)

(see p.8, No. 7)



1-2: From eDP PWM to CON\_LBKLT\_CTL

2-3: From LVDS PWM to CON\_LBKLT\_CTL

---

### COM Port Pin9 PWR Setting Jumpers

(3-pin PWR\_COM1, for COM Port1)

(3-pin PWR\_COM2, for COM Port2)

(3-pin PWR\_COM3, for COM Port3)

(3-pin PWR\_COM4, for COM Port4)

(3-pin PWR\_COM5, for COM Port5)

(3-pin PWR\_COM6, for COM Port6)

(see p.8, No. 18)



1-2: +5V

2-3: +12V

---

### USB Power Setting Jumpers

(3-pin USB3\_PWR1 (For USB3\_0\_USB2\_3))

(3-pin USB2\_PWR0\_1 (For USB2\_0\_1))

(see p.8, No. 1)



1-2: +5V

2-3: +5VSB

(3-pin USB2\_PWR4\_5 (For USB2\_4\_5))

(3-pin USB2\_PWR6\_7 (For USB2\_6\_7))

(3-pin USB2\_PWR8 (For USB2\_8))

(see p.8, No. 31)



1-2: +5V

2-3: +5VSB

---

**Digital Input / Output Default Value Setting**

(3-pin JGPIO\_SET1)

(see p.8, No. 16)



1-2: Pull-High

2-3: Pull-Low

---

**SIO\_AT Select**

(2-pin SIO\_AT1)

(see p.8, No. 21)



Open: ATX Mode

2-Short: AT Mode

---

**PWR\_BAT Select**

(2-pin PWR\_BAT1)

(see p.8, No. 32)



Open: Normal

2-Short: Charge Battery



## 2.6 Onboard Headers and Connectors



Onboard headers and connectors are NOT jumpers. Do NOT place jumper caps over these headers and connectors. Placing jumper caps over the headers and connectors will cause permanent damage of the motherboard!

### SATA2 Connectors

(SATA2\_1: see p.8, No. 4)

(SATA2\_2: see p.8, No. 29)\*

\* Shared with M.2 KEY M (M2)

SATA2\_1



SATA2\_2




These Serial ATA2

(SATA2) connectors support SATA data cables for internal storage devices. The current SATA2 interface allows up to 3.0 Gb/s data transfer rate.

### USB 2.0 Connectors

(9-pin USB2\_4\_5, USB2\_6\_7)

(see p.8 No. 34)



There are two USB 2.0

connectors and one USB 2.0 port on this motherboard.

### USB 2.0 Port

(USB2\_8)


(see p.8 No. 28)



### System Panel Header

(9-pin PANEL1)

(see p.8 No. 12)



This header accommodates

several system front panel functions.



Connect the power switch, reset switch and system status indicator on the chassis to this header according to the pin assignments below. Note the positive and negative pins before connecting the cables.

#### **PWRBTN (Power Switch):**

Connect to the power switch on the chassis front panel. You may configure the way to turn off your system using the power switch.

#### **RESET (Reset Switch):**

Connect to the reset switch on the chassis front panel. Press the reset switch to restart the computer if the computer freezes and fails to perform a normal restart.

**PLED (System Power LED):**

Connect to the power status indicator on the chassis front panel. The LED is on when the system is operating. The LED keeps blinking when the system is in S1 sleep state. The LED is off when the system is in S3/S4 sleep state or powered off (S5).

**HDLED (Hard Drive Activity LED):**

Connect to the hard drive activity LED on the chassis front panel. The LED is on when the hard drive is reading or writing data.

The front panel design may differ by chassis. A front panel module mainly consists of power switch, reset switch, power LED, hard drive activity LED, speaker and etc. When connecting your chassis front panel module to this header, make sure the wire assignments and the pin assignments are matched correctly.

**3W Audio AMP Output Wafer**


(4-pin SPEAKER1)  
(see p.8 No. 27)



PIN	Signal Name
4	OUTRN
3	OUTRP
2	OUTLP
1	OUTLN

**Front Panel Audio Header**

(9-pin HD\_AUDIO1)  
(see p.8 No. 26)



This is an interface for front panel audio cable that allows convenient connection and control of audio devices.




- High Definition Audio supports Jack Sensing, but the panel wire on the chassis must support HDA to function correctly. Please follow the instruction in our manual and chassis manual to install your system.
- If you use AC'97 audio panel, please install it to the front panel audio header as below:
  - Connect Mic\_IN (MIC) to MIC2\_L.
  - Connect Audio\_R (RIN) to OUT2\_R and Audio\_L (LIN) to OUT2\_L.
  - Connect Ground (GND) to Ground (GND).
  - MIC\_RET and OUT\_RET are for HD audio panel only. You don't need to connect them for AC'97 audio panel.
  - To activate the front mic.  
Go to the "FrontMic" Tab in the Realtek Control panel. Adjust "Recording Volume".

### Chassis Fan Connector (Optional)

(4-pin CHA\_FAN1)

(see p.8 No. 20)




Please connect the fan cable to the fan connector and match the black wire to the ground pin.

### CPU Fan Connector

(4-pin CPU\_FAN1)

(see p.8 No. 19)



Please connect the CPU fan cable to the connector and match the black wire to the ground pin.



Though this motherboard provides 4-Pin CPU fan (Quiet Fan) support, the 3-Pin CPU fan still can work successfully even without the fan speed control function. If you plan to connect the 3-Pin CPU fan to the CPU fan connector on this motherboard, please connect it to Pin 1-3.

**Pin 1-3 Connected** ←



3-Pin Fan Installation

### 4-pin DC-in PWR Connector & UPS

#### Module Power Output Connector

(Input +12V)

(4-pin FROM\_UPS1)

(see p.8 No. 2)




Please connect a DC +12V power supply to this connector.  
Pin1 and Pin4: GND  
Pin2 and Pin3: DC Input

### Printer Port / GPIO Header

(25-pin LPT\_GPIO1)

(see p.8 No. 15)

#### Printer Port:



#### GPIO:


PIN	Signal Name	PIN	Signal Name
26	NC	25	NA
24	GND	23	SIO_GP30
22	GND	21	SIO_GP31
20	GND	19	SIO_GP32
18	GND	17	SIO_GP33
16	GND	15	SIO_GP34
14	GND	13	SIO_GP35
12	JGPIOPWR	11	SIO_GP36
10	JGPIOPWR	9	SIO_GP37
8	SIO_GP43	7	SIO_GP40
6	SIO_GP44	5	SIO_GP41
4	SIO_GP45	3	SIO_GP42
2	SIO_GP46	1	SIO_GP47

\* If you want to use the printer port function, please short pin4 and pin5 on Digital Input / Output Power Select (JGPIO\_PWR1).

## LVDS Connector

(40-pin LVDS1)

(see p.8 No. 6)



PIN	Signal Name	PIN	Signal Name
2	LCD_VCC	1	LCD_VCC
4	LDDC_CLK	3	+3.3V
6	LVDS_A_DATA0#	5	LDDC_DATA
8	PD (Panel Detection)	7	LVDS_A_DATA0
10	LVDS_A_DATA1	9	LVDS_A_DATA1#
12	LVDS_A_DATA2#	11	GND
14	GND	13	LVDS_A_DATA2
16	LVDS_A_DATA3	15	LVDS_A_DATA3#
18	LVDS_A_CLK#	17	GND
20	GND	19	LVDS_A_CLK
22	LVDS_B_DATA0	21	LVDS_B_DATA0#
24	LVDS_B_DATA1#	23	GND
26	GND	25	LVDS_B_DATA1
28	LVDS_B_DATA2	27	LVDS_B_DATA2#
30	LVDS_B_DATA3#	29	DPLVDD_EN
32	NC	31	LVDS_B_DATA3
34	LVDS_B_CLK	33	LVDS_B_CLK#
36	CON_LBKLT_EN	35	GND
38	LCD_BLT_VCC	37	CON_LBKLT_CTL
40	LCD_BLT_VCC	39	LCD_BLT_VCC

## \* eDP Connector (on the Backside of PCB)




PIN	Signal Name
40	NA
39	LCD_BLT_VCC
38	LCD_BLT_VCC
37	LCD_BLT_VCC
36	LCD_BLT_VCC
35	NA
34	NA
33	CON_LBKLT_CTL
32	CON_LBKLT_EN
31	GND
30	GND
29	GND
28	GND
27	eDP_HPD_CON
26	GND
25	GND
24	GND
23	GND
22	NA
21	LCD_VCC
20	LCD_VCC
19	LCD_VCC
18	LCD_VCC
17	GND
16	eDP_AUX#_CON
15	eDP_AUX_CON
14	GND
13	eDP_TX0_CON
12	eDP_TX#0_CON
11	GND
10	eDP_TX1_CON
9	eDP_TX#1_CON
8	GND
7	eDP_TX2_CON
6	eDP_TX#2_CON
5	GND
4	eDP_TX3_CON
3	eDP_TX#3_CON
2	GND
1	NA

\* PD (Panel Detection): Connect this pin to LVDS Panel's Ground pin to detect Panel detection.

## VGA Header

(10-pin VGA1: see p.8, No. 33)



PIN	Signal Name	PIN	Signal Name
9	DDC_CLK	10	DDC_DATA
7	HSYNC	8	VSYNC
5	BLUE	6	GND
3	GREEN	4	GND
1	RED	2	GND

---

### Backlight Volume Control

(7-pin BLT\_VOL1)

(see p.8 No. 8)



PIN	Signal Name
1	GPIO_VOL_UP
2	GPIO_VOL_DW
3	PWRDN
4	BRIGHTNESS_UP
5	BRIGHTNESS_DW
6	GND
7	GND

---

### Backlight Power Connector

(6-pin BLT\_PWR1)

(see p.8 No. 9)




PIN	Signal Name
1	GND
2	GND
3	CON_LBKLT_CTL
4	CON_LBKLT_EN
5	LCD_BLT_VCC
6	LCD_BLT_VCC

---

### SATA Power Output Connector

(4-pin SATA\_PWR1)

(see p.8 No. 3)



---

### BL1, BL2

(2-pin BL1)

(see p.8 No. 5)



Open : Protect LCD\_BLT\_VCC  
Short : No Protect LCD\_BLT\_VCC

(2-pin BL2)

(see p.8 No. 5)



Open : Protect LCD\_VCC  
Short : No Protect LCD\_VCC

---

### Chassis Intrusion Headers

(2-pin CI1, CI2: see p.8, No. 23)



This motherboard supports CASE OPEN detection feature that detects if the chassis cover has been removed. This feature requires a chassis with chassis intrusion detection design.

CI1 :

Close : Active Case Open

Open : Normal

CI2 :

Close : Normal


Open : Active Case Open

### Internal COM Port Headers:

COM3 (RS232/422/485)

COM1, 2, 4, 5, 6 (RS232)

(10-pin COM1-6: see p.8, No. 14)



PIN	Signal Name	PIN	Signal Name	PIN	Signal Name	PIN	Signal Name	PIN	Signal Name
10	N/A	8	CCTS#	6	DDSR#	4	DDTR#	2	RRXD
9	PWR	7	RRTS#	5	GND	3	TTXD	1	DDCD#

\* This motherboard supports RS232/422/485 on COM3 port. Please refer to below table for the pin definition. In addition, COM3 port (RS232/422/485) can be adjusted in BIOS setup utility > Advanced Screen > Super IO Configuration. You may refer to page 30 for details.


### COM3 Port Pin Definition

PIN	RS232	RS422	RS485
1	DCD	TX-	RTX-
2	RXD	RX+	N/A
3	TXD	TX+	RTX+
4	DTR	RX-	N/A
5	GND	GND	GND
6	DSR	N/A	N/A
7	RTS	N/A	N/A
8	CTS	N/A	N/A
9	PWR	PWR	PWR
10	N/A	N/A	N/A

### LPC Header

(19-pin LPC1)


(see p.8, No. 2)



This connector supports a Trusted Platform Module (TPM) system, which can securely store keys, digital certificates, passwords, and data. A TPM system also helps enhance network security, protects digital identities, and ensures platform integrity.

### SPDIF Header

(3-pin SPDIF1: see p.8, No. 24)



### PS2 Keyboard/Mouse Header

(8-pin PS2\_KB\_MS1: see p.8, No. 30)



PIN	Signal Name	PIN	Signal Name	PIN	Signal Name	PIN	Signal Name
8	GND	6	GND	4	USB2_PWR6_7	2	USB2_PWR6_7
7	MSCLK	5	MSDATA	3	KBDATA	1	KBCLK

---

# Chapter 3: UEFI SETUP UTILITY

## 3.1 Introduction

This section explains how to use the UEFI SETUP UTILITY to configure your system. The UEFI chip on the motherboard stores the UEFI SETUP UTILITY. You may run the UEFI SETUP UTILITY when you start up the computer. Please press <F2> or <Del> during the Power-On-Self-Test (POST) to enter the UEFI SETUP UTILITY, otherwise, POST will continue with its test routines.

If you wish to enter the UEFI SETUP UTILITY after POST, restart the system by pressing <Ctl> + <Alt> + <Delete>, or by pressing the reset button on the system chassis. You may also restart by turning the system off and then back on.



Because the UEFI software is constantly being updated, the following UEFI setup screens and descriptions are for reference purpose only, and they may not exactly match what you see on your screen.

### 3.1.1 UEFI Menu Bar

The top of the screen has a menu bar with the following selections:

<b>Main</b>	To set up the system time/date information
<b>Advanced</b>	To set up the advanced UEFI features
<b>H/W Monitor</b>	To display current hardware status
<b>Security</b>	To set up the security features
<b>Boot</b>	To set up the default system device to locate and load the Operating System
<b>Exit</b>	To exit the current screen or the UEFI SETUP UTILITY

Use < ← > key or < → > key to choose among the selections on the menu bar, and then press <Enter> to get into the sub screen. You can also use the mouse to click your required item.


### 3.1.2 Navigation Keys

Please check the following table for the function description of each navigation key.

Navigation Key(s)	Function Description
← / →	Moves cursor left or right to select Screens
↑ / ↓	Moves cursor up or down to select items
+ / -	To change option for the selected items
<Enter>	To bring up the selected screen
<F1>	To display the General Help Screen
<F7>	Discard changes
<F9>	To load optimal default values for all the settings
<F10>	To save changes and exit the UEFI SETUP UTILITY
<F12>	Print screen
<ESC>	To jump to the Exit Screen or exit the current screen

### 3.2 Main Screen

When you enter the UEFI SETUP UTILITY, the Main screen will appear and display the system overview.

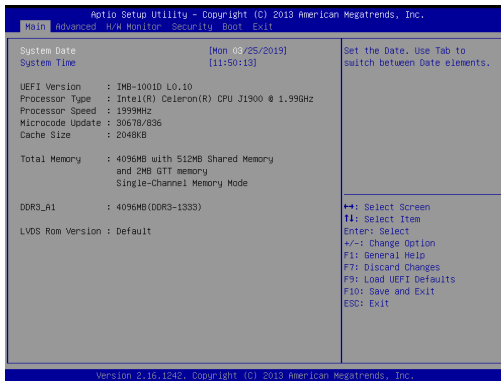




---

### 3.3 Advanced Screen

In this section, you may set the configurations for the following items: CPU Configuration, Chipset Configuration, Storage Configuration, Super IO Configuration, ACPI Configuration, USB Configuration and Trusted Computing.

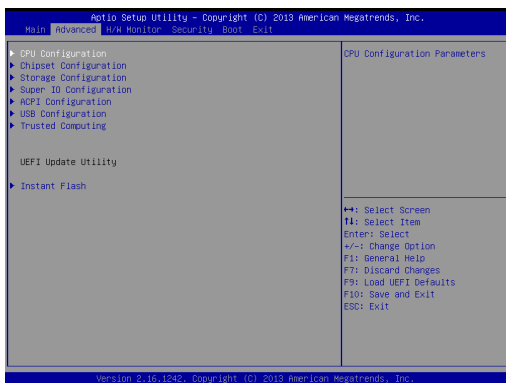


Setting wrong values in this section may cause the system to malfunction.

#### Instant Flash

Instant Flash is a UEFI flash utility embedded in Flash ROM. This convenient UEFI update tool allows you to update system UEFI without entering operating systems first like MS-DOS or Windows®. Just launch this tool and save the new UEFI file to your USB flash drive, floppy disk or hard drive, then you can update your UEFI only in a few clicks without preparing an additional floppy diskette or other complicated flash utility. Please be noted that the USB flash drive or hard drive must use FAT32/16/12 file system. If you execute Instant Flash utility, the utility will show the UEFI files and their respective information. Select the proper UEFI file to update your UEFI, and reboot your system after UEFI update process completes.

---

### 3.3.1 CPU Configuration

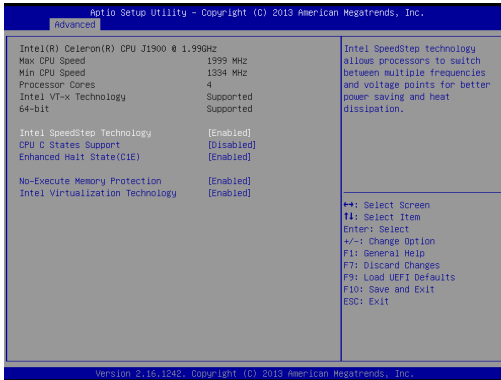

#### Intel SpeedStep Technology

Intel SpeedStep technology is Intel's new power saving technology. Processors can switch between multiple frequencies and voltage points to enable power saving. The default value is [Enabled]. Configuration options: [Enabled] and [Disabled]. If you install Windows® OS and want to enable this function, please set this item to [Enabled]. This item will be hidden if the current CPU does not support Intel SpeedStep technology.



Please note that enabling this function may reduce CPU voltage and lead to system stability or compatibility issues with some power supplies. Please set this item to [Disabled] if above issues occur.

#### CPU C States Support

Enable CPU C States Support for power saving. It is recommended to keep C3, C6 and C7 all enabled for better power saving.

#### Enhanced Halt State (C1E)

Enable Enhanced Halt State (C1E) for lower power consumption.

#### No-Execute Memory Protection


Processors with No-Execution Memory Protection Technology may prevent certain classes of malicious buffer overflow attacks.

#### Intel Virtualization Technology

When this option is set to [Enabled], a VMM (Virtual Machine Architecture) can utilize the additional hardware capabilities provided by Vanderpool Technology. This option will be hidden if the installed CPU does not support Intel Virtualization Technology.

---

## 3.3.2 Chipset Configuration

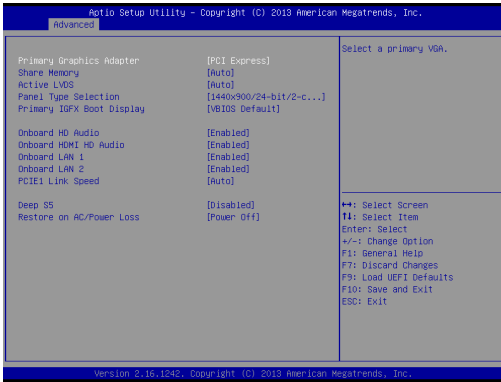

### Primary Graphics Adapter

This allows you to select [Onboard] or [PCI Express] as the boot graphic adapter priority. The default value is [Onboard].

### Share Memory

Configure the size of memory that is allocated to the integrated graphics processor when the system boots up.

### Active LVDS

Use this to enable or disable the LVDS. The default value is [Disabled]. Set the item to [enable]. Then press <F10> to save the setting and restart the system. Now the default value of Active LVDS is changed to ENABLE (F9 load default is also set to ENABLE)

Change the setting from [Enable] to [Disable], and then press <F10> to save the setting and restart the system. Likewise, the default value of Active LVDS is changed to DISABLE (F9 load default is also set to DISABLE).

### Panel Type Selection

Use this to select panel type. This item appears when you enable Active LVDS.



The default values of Active LVDS and Panel Type Selection will be changed only when the users manually adjust them. They will keep at the default values no matter you clear CMOS, use Instant Flash or press <F9>.

### Primary IGFX Boot Display

Select a primary VGA.

### Onboard HD Audio

Select [Enabled] or [Disabled] for the onboard HD Audio feature.

---

---

**Onboard HDMI HD Audio**

Enable audio for the onboard digital outputs.

**Onboard LAN 1**

This allows you to enable or disable the Onboard LAN 1 feature.

**Onboard LAN 2**

This allows you to enable or disable the Onboard LAN 2 feature.

**PCIE1 Link Speed**

Select the link speed for PCIE1.

**Deep S5**


Mobile platforms support Deep S5 in DC only and desktop platforms support Deep S5 in AC only. The default value is [Disabled].

**Restore on AC/Power Loss**

Select the power state after a power failure. If [Power Off] is selected, the power will remain off when the power recovers. If [Power On] is selected, the system will start to boot up when the power recovers.

---

### 3.3.3 Storage Configuration

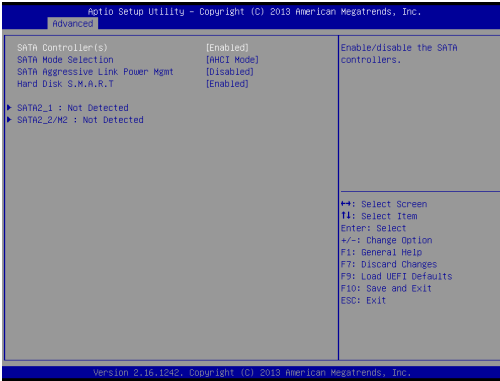

#### **SATA Controller(s)**

Use this item to enable or disable the SATA Controller feature.

#### **SATA Mode Selection**

Use this to select SATA mode. The default value is [AHCI Mode].

#### **SATA Aggressive Link Power Management**

Use this item to configure Aggressive Link Power Management.

#### **Hard Disk S.M.A.R.T.**

Use this item to enable or disable the S.M.A.R.T. (Self-Monitoring, Analysis, and Reporting Technology) feature. Configuration options: [Disabled] and [Enabled].

---

### 3.3.4 Super IO Configuration



#### COM1

Use this to enable or disable COM1.

#### COM2

Use this to enable or disable COM2.

#### COM3

Use this to enable or disable COM3.

#### Type Select

Use this to select COM2 port type: [RS232], [RS422] or [RS485].

#### COM4

Use this to enable or disable COM4.

#### COM5

Use this to enable or disable COM5.

#### COM6

Use this to enable or disable COM6.

#### LPT1 Port

Use this set LPT port.

#### Device Mode

Select the device mode according to your connected device.

#### Change Settings

Select the address of the Parallel port.

#### COM Port IQR Port


Use this set COM port IQR port.

#### WDT Timeout Reset

Use this to set the Watch Dog Timer.

---

### 3.3.5 ACPI Configuration

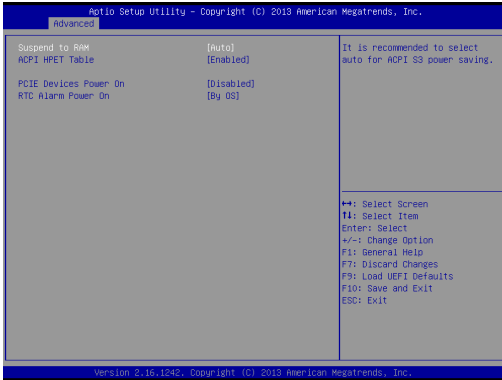

#### Suspend to RAM

Use this item to select whether to auto-detect or disable the Suspend-to-RAM feature. Select [Auto] will enable this feature if the OS supports it.

#### ACPI HPET Table

Use this item to enable or disable ACPI HPET Table. The default value is [Enabled]. Please set this option to [Enabled] if you plan to use this motherboard to submit Windows® certification.

#### PCIE Devices Power On


Use this item to enable or disable PCIE devices to turn on the system from the power-soft-off mode.

#### RTC Alarm Power On

Use this item to enable or disable RTC (Real Time Clock) to power on the system.

---

### 3.3.6 USB Configuration

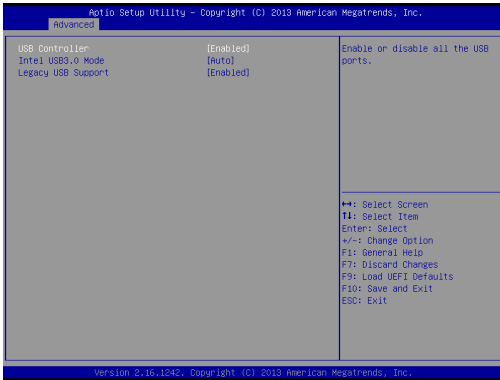

#### USB Controller

Enable or disable all the USB 2.0 ports.

#### Intel USB3.0 Mode

Enable or disable Intel USB USB 3.0 ports.

#### Legacy USB Support

Use this option to select legacy support for USB devices. There are three configuration options: [Enabled], [Auto] and [UEFI Setup Only]. The default value is [Enabled]. Please refer to below descriptions for the details of these four options:

[Enabled] - Enables support for legacy USB.


[Auto] - Enables legacy support if USB devices are connected.

[UEFI Setup Only] - USB devices are allowed to use only under UEFI setup and Windows / Linux OS.



---

### 3.3.7 Trusted Computing

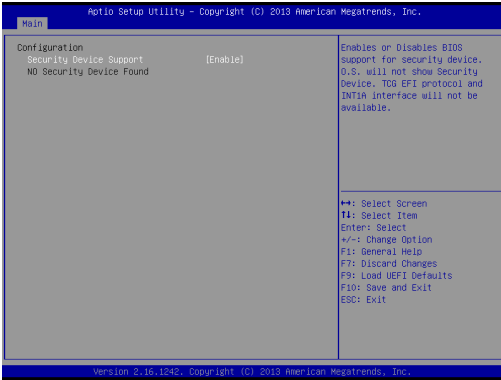


#### Security Device Support

Enable or disable BIOS support for security device.

---

### 3.4 Hardware Health Event Monitoring Screen

In this section, it allows you to monitor the status of the hardware on your system, including the parameters of the CPU temperature, motherboard temperature, CPU fan speed, chassis fan speed, and the critical voltage.

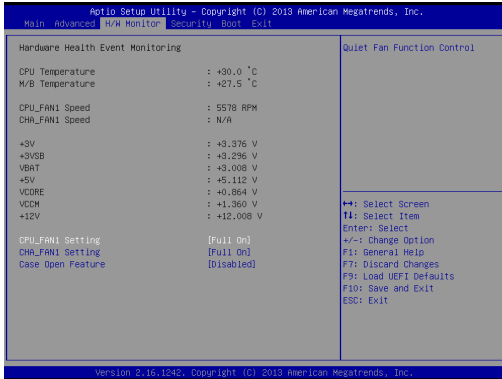

#### CPU\_FAN1 Setting

This allows you to set CPU\_FAN1's speed. Configuration options: [Full On] and [Automatic Mode]. The default value is [Full On].

#### CHA\_FAN1 Setting

This allows you to set CHA\_FAN1's speed. Configuration options: [Full On] and [Automatic Mode]. The default value is [Full On].

#### Case Open Feature

This allows you to enable or disable case open detection feature. The default is value [Disabled].


#### Clear Status

This option appears only when the case open has been detected. Use this option to keep or clear the record of previous chassis intrusion status.

---

## 3.5 Security Screen

In this section, you may set, change or clear the supervisor/user password for the system.

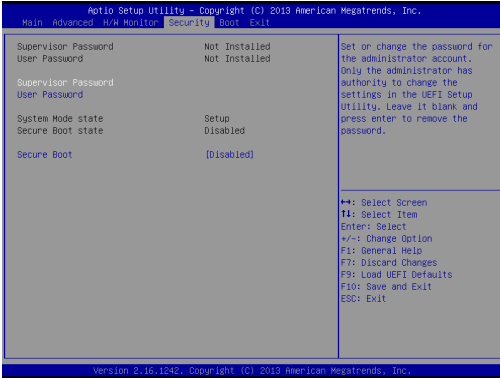

### Supervisor Password

Set or change the password for the administrator account. Only the administrator has authority to change the settings in the UEFI Setup Utility. Leave it blank and press enter to remove the password.

### User Password

Set or change the password for the user account. Users are unable to change the settings in the UEFI Setup Utility. Leave it blank and press enter to remove the password.


### Secure Boot

Enable to support Windows 8 / 8.1 64-bit Secure Boot.

---

## 3.6 Boot Screen

In this section, it will display the available devices on your system for you to configure the boot settings and the boot priority.

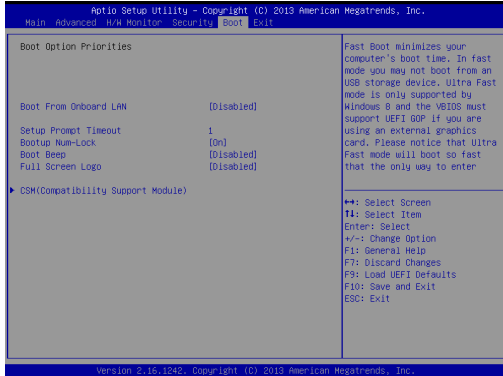

### Boot From Onboard LAN

Use this item to enable or disable the Boot From Onboard LAN feature.

### Setup Prompt Timeout

This shows the number of seconds to wait for setup activation key.

### Bootup Num-Lock

If this item is set to [On], it will automatically activate the Numeric Lock function after boot-up.

### Boot Beep


Select whether the Boot Beep should be turned on or off when the system boots up. Please note that a buzzer is needed.

### Full Screen Logo

Use this item to enable or disable OEM Logo. The default value is [Disabled].

---

## CSM (Compatibility Support Module)

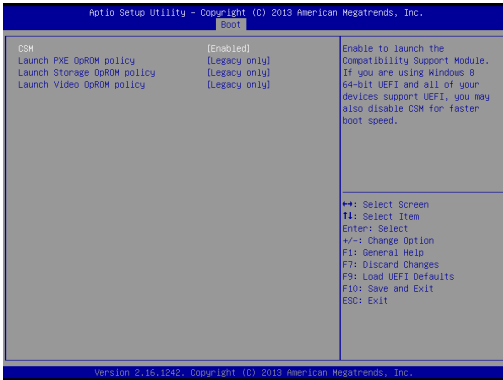

### CSM

Enable to launch the Compatibility Support Module. Please do not disable unless you're running a WHCK test. If you are using Windows 8 / 8.1 64-bit and all of your devices support UEFI, you may also disable CSM for faster boot speed.

### Launch PXE OpROM Policy

Select UEFI only to run those that support UEFI option ROM only. Select Legacy only to run those that support legacy option ROM only. Select Do not launch to not execute both legacy and UEFI option ROM.

### Launch Storage OpROM Policy


Select UEFI only to run those that support UEFI option ROM only. Select Legacy only to run those that support legacy option ROM only. Select Do not launch to not execute both legacy and UEFI option ROM.

### Launch Video OpROM Policy

Select UEFI only to run those that support UEFI option ROM only. Select Legacy only to run those that support legacy option ROM only. Select Do not launch to not execute both legacy and UEFI option ROM.

---

## 3.7 Exit Screen

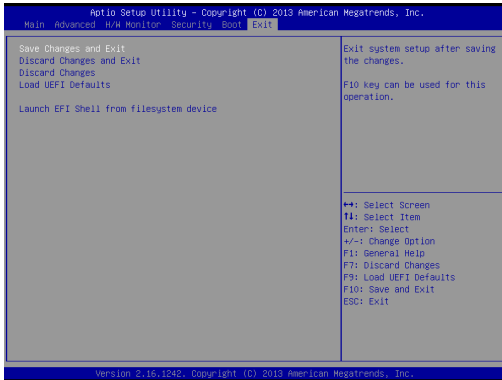

### Save Changes and Exit

When you select this option, it will pop-out the following message, "Save configuration changes and exit setup?" Select [OK] to save the changes and exit the UEFI SETUP UTILITY.

### Discard Changes and Exit

When you select this option, it will pop-out the following message, "Discard changes and exit setup?" Select [OK] to exit the UEFI SETUP UTILITY without saving any changes.

### Discard Changes

When you select this option, it will pop-out the following message, "Discard changes?" Select [OK] to discard all changes.

### Load UEFI Defaults

Load UEFI default values for all the setup questions. F9 key can be used for this operation.

### Launch EFI Shell from filesystem device

Attempts to Launch EFI Shell application (Shell64.efi) from one of the available filesystem devices.

---

## **Chapter 4: Software Support**

### **4.1 Install Operating System**

This motherboard supports Microsoft® Windows® operating systems: 10 32-bit / 10 64-bit / 8.1 32-bit / 8.1 64-bit / 8 32-bit / 8 64-bit / 7 32-bit / 7 64-bit. Because motherboard settings and hardware options vary, use the setup procedures in this chapter for general reference only. Refer to your OS documentation for more information.

### **4.2 Support CD Information**

The Support CD that came with the motherboard contains necessary drivers and useful utilities that enhance the motherboard's features.

#### **4.2.1 Running The Support CD**

To begin using the support CD, insert the CD into your CD-ROM drive. The CD automatically displays the Main Menu if "AUTORUN" is enabled in your computer. If the Main Menu did not appear automatically, locate and double click on the file "ASRSETUP.EXE" from the BIN folder in the Support CD to display the menus.

#### **4.2.2 Drivers Menu**

The Drivers Menu shows the available device's drivers if the system detects installed devices. Please install the necessary drivers to activate the devices.

#### **4.2.3 Utilities Menu**

The Utilities Menu shows the application software that the motherboard supports. Click on a specific item then follow the installation wizard to install it.

#### **4.2.4 Contact Information**

If you need to contact ASRock or want to know more about ASRock, you're welcome to visit ASRock's website at <http://www.asrock.com>; or you may contact your dealer for further information.