




EPC612D8 / EPC612D8A / EPC612D8A-TB



1. Unplug the power cord from the wall socket before touching any components.
2. To avoid damaging the server board's components due to static electricity, NEVER place your server board directly on the carpet or the like. Also remember to use a grounded wrist strap or touch a safety grounded object before you handle the components.
3. Hold components by the edges and do not touch the ICs.
4. Whenever you uninstall any component, place it on a grounded anti-static pad or in the bag that comes with the component.
5. When placing screws into the screw holes to secure the server board to the chassis, please do not over-tighten the screws! Doing so may damage the server board.

- 2 Affix the screws clockwise into the mounting holes in all of the corners of the server board.
Do not over-tighten the screws

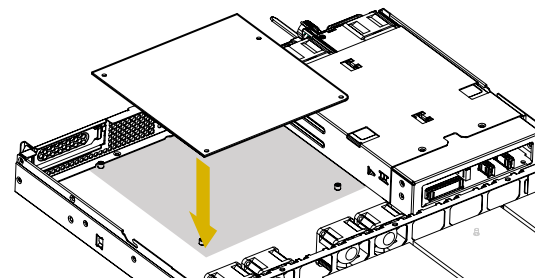

24.4cm (9.6 in)

25.0cm (9.8 in)

DDR4_C1 (64 bit, 288-pin module)

DDR4_C2 (64 bit, 288-pin module)

DDR4_D1 (64 bit, 288-pin module)

DDR4_D2 (64 bit, 288-pin module)

ATXPWR1

PSU_SMB1

CPU_FAN1

VGA1

COM1

LAN1 (NCSI)

LAN2

USB 2.0
T: USB_1
B: USB_2

TBT1

DP_IN1

REAR_FAN1

USB 3.0
T: USB3_2
B: USB3_1

Top:
IMPI_LAN

DDR4_B2 (64 bit, 288-pin module)

DDR4_B1 (64 bit, 288-pin module)

DDR4_A2 (64 bit, 288-pin module)

DDR4_A1 (64 bit, 288-pin module)

PCIE7

PCIE6

PCIE5

RoHS

EPC612D8A-TB

PCIE3

PCIE1

BMC ROM

128Mb BIOS

BUZZER1

Intel C612

Dr. Debug

COM2

SMB1_BTN1

SPEAKER1

TR1

PANEL1

FRONT_FAN1

FRONT_FAN2

USB_5

SATA_1

SATA_2

SATA_3

SATA_PWR1

SATA_4

SATA_5

SATA_6

SATA_7

SATA_8

SATA_9

SATA_10

SATA_11

SATA_12

SATA_13

SATA_14

SATA_15

SATA_16

SATA_17

SATA_18

SATA_19

SATA_20

SATA_21

SATA_22

SATA_23

SATA_24

SATA_25

SATA_26

SATA_27

SATA_28

SATA_29

SATA_30

SATA_31

SATA_32

SATA_33

SATA_34

SATA_35

SATA_36

SATA_37

SATA_38

SATA_39

SATA_40

SATA_41

SATA_42

SATA_43

SATA_44

SATA_45

SATA_46

SATA_47

SATA_48

SATA_49

SATA_50

SATA_51

SATA_52

SATA_53

SATA_54

SATA_55

SATA_56

SATA_57

SATA_58

SATA_59

SATA_60

SATA_61

SATA_62

SATA_63

SATA_64

SATA_65

SATA_66

SATA_67

SATA_68

SATA_69

SATA_70

SATA_71

SATA_72

SATA_73

SATA_74

SATA_75

SATA_76

SATA_77

SATA_78

SATA_79

SATA_80

SATA_81

SATA_82

SATA_83

SATA_84

SATA_85

SATA_86

SATA_87

SATA_88

SATA_89

SATA_90

SATA_91

SATA_92

SATA_93

SATA_94

SATA_95

SATA_96

SATA_97

SATA_98

SATA_99

SATA_100

SATA_101

SATA_102

SATA_103

SATA_104

SATA_105

SATA_106

SATA_107

SATA_108

SATA_109

SATA_110

SATA_111

SATA_112

SATA_113

SATA_114

SATA_115

SATA_116

SATA_117

SATA_118

SATA_119

SATA_120

SATA_121

SATA_122

SATA_123

SATA_124

SATA_125

SATA_126

SATA_127

SATA_128

SATA_129

SATA_130

SATA_131

SATA_132

SATA_133

SATA_134

SATA_135

SATA_136

SATA_137

SATA_138

SATA_139

SATA_140

SATA_141

SATA_142

SATA_143

SATA_144

SATA_145

SATA_146

SATA_147

SATA_148

SATA_149

SATA_150

SATA_151

SATA_152

SATA_153

SATA_154

SATA_155

SATA_156

SATA_157

SATA_158

SATA_159

SATA_160

SATA_161

SATA_162

SATA_163

SATA_164

SATA_165

SATA_166

SATA_167

SATA_168

SATA_169

SATA_170

SATA_171

SATA_172

SATA_173

SATA_174

SATA_175

SATA_176

SATA_177

SATA_178

SATA_179

SATA_180

SATA_181

SATA_182

SATA_183

SATA_184

SATA_185

SATA_186

SATA_187

SATA_188

SATA_189

SATA_190

SATA_191

SATA_192

SATA_193

SATA_194

SATA_195

SATA_196

SATA_197

SATA_198

SATA_199

SATA_200

SATA_201

SATA_202

SATA_203

SATA_204

SATA_205

SATA_206

SATA_207

SATA_208

SATA_209

SATA_210

SATA_211

SATA_212

SATA_213

SATA_214

SATA_215

SATA_216

SATA_217

SATA_218

SATA_219

SATA_220

SATA_221

SATA_222

SATA_223

SATA_224

SATA_225

SATA_226

SATA_227

SATA_228

SATA_229

SATA_230

SATA_231

SATA_232

SATA_233

SATA_234

SATA_235

SATA_236

SATA_237

SATA_238

SATA_239

SATA_240

SATA_241

SATA_242

SATA_243

SATA_244

SATA_245

SATA_246

SATA_247

SATA_248

SATA_249

SATA_250

SATA_251

SATA_252

SATA_253

SATA_254

SATA_255

SATA_256

SATA_257

SATA_258

SATA_259

SATA_260

SATA_261

SATA_262

SATA_263

SATA_264

SATA_265

SATA_266

SATA_267

SATA_268

SATA_269

SATA_270

SATA_271

SATA_272

SATA_273

SATA_274

SATA_275

SATA_276

SATA_277

SATA_278

SATA_279

SATA_280

SATA_281

SATA_282

SATA_283

SATA_284

SATA_285

SATA_286

SATA_287

SATA_288

SATA_289

SATA_290

SATA_291

SATA_292

SATA_293

SATA_294

SATA_295

SATA_296

SATA_297

SATA_298

SATA_299

SATA_300

SATA_301

SATA_302

SATA_303

SATA_304

SATA_305

SATA_306

SATA_307

SATA_308

SATA_309

SATA_310

SATA_311

SATA_312

SATA_313

SATA_314

SATA

No.	Description
1	2 x 288-pin DDR4 DIMM Slots (DDR4_C2, DDR4_D2, White)
2	2 x 288-pin DDR4 DIMM Slots (DDR4_C1, DDR4_D1, Blue)
3	ATX 12V Power Connector (ATX12V1)
4	PSU SMBus (PSU_SMB1)
5	ATX Power Connector (ATXPWR1)
6	CPU Fan Connector (CPU_FAN1)
7	2 x 288-pin DDR4 DIMM Slots (DDR4_A2, DDR4_B2, White)
8	2 x 288-pin DDR4 DIMM Slots (DDR4_A1, DDR4_B1, Blue)
9	USB 3.0 Header (USB3_3_4)
10	TPM Header (TPM1)
11	SATA3 Connector (M_SATA_1), White
12	SATA3 Connector (M_SATA_0), White
13	Front Fan Connector (FRONT_FAN2)
14	Front Fan Connector (FRONT_FAN1)
15	SATA3 Connector (SATA_4), White
16	SATA3 Connector (SATA_3), White
17	SATA3 Connector (SATA_2), White
18	SATA3 Connector (SATA_1), White
19	SATA3 Connector (SSATA_1), White
20	SATA3 Connector (SSATA_0), White
21	SATA SGPIO Connector (SATA_SGPIO1)
22	USB 2.0 Header (USB_3_4)
23	SATA SGPIO Connector (SATA_SGPIO3)
24	SATA3 DOM Connector (SATA_0), Red
25	SATA DOM Power Jumper (SATAPWR1)
26	SATA SGPIO Connector (SATA_SGPIO2)
27	SATA3 Connector (SATA_5), White
28	SATA3 Connector (SSATA_2), White (Marvell 9172)
29	SATA3 Connector (SSATA_3), White (Marvell 9172)
30	SATA DOM Power Header (SATA_PWR1)
31	Vertical Type A USB 2.0 (USB_5)
32	Front Fan Connector (FRONT_FAN3)
33	System Panel Header (PANEL1)
34	Thermal Sensor header (TR1)
35	Auxiliary Panel Header (AUX_PANEL1)
36	Speaker Header (SPEAKER1)
37	Intelligent Platform Management Bus header (IPMB_1)
38	BMC SMBus Header (BMC_SMB_3)
39	BMC SMBus Header (BMC_SMB_2)
40	BMC SMBus Header (BMC_SMB_1)
41	Non Maskable Interrupt Button (NMI_BTN1)
42	COM Port Header (COM2)
43	Chassis ID0 Jumper (Chassis ID0)
44	CPU PECI Jumper (PECI1)
45	Chassis ID0 Jumper (Chassis ID1)
46	HDMI_SPDIF Header (HDMI_SPDIF1)*
47	Chassis ID0 Jumper (Chassis ID2)
48	Front Panel Audio Header (HD_AUDIO1)*
49	Rear Fan Connector (REAR_FAN1)

*Supports EPC612D8A and EPC612D8A-TB only

A diagram showing 12 types of connectors used in computer systems, numbered 1 through 12. The connectors are arranged in a row on a black background. The numbers are placed in grey circles above and below the connectors. The connectors are: 1. A 15-pin D-sub connector (VGA). 2. A 9-pin D-sub connector (serial). 3. A BNC connector. 4. A DVI connector. 5. A FireWire connector. 6. A USB connector. 7. A FireWire connector. 8. A DVI connector. 9. A FireWire connector. 10. A BNC connector. 11. A DVI connector. 12. A FireWire connector.

No.	Description	No.	Description
1	Serial Port (COM1)	7	Display Port Input (DP_IN1)*
2	VGA Port (VGA1)	8	LAN RJ-45 Port (IPMI_LAN)
3	LAN RJ-45 Port (LAN2)	9	USB 3.0 Ports (USB3_1-2)
4	LAN RJ-45 Port (LAN1) (NCSI)	10	Front Speaker (Lime)**
5	USB 2.0 Ports (USB_1_2)	11	Microphone (Pink)**
6	Thunderbolt Port (TB1)*	12	Line In (Light Blue)**

****Supports EPC612D8A only**


Short

Open

When the jumper cap is placed on the pins, the jumper is “Short”. If no jumper cap is placed on the pins, the jumper is “Open”.


The illustration shows a 3-pin jumper whose pin1 and pin2 are “Short” when a jumper cap is placed on these 2 pins.

5 Install the Processor

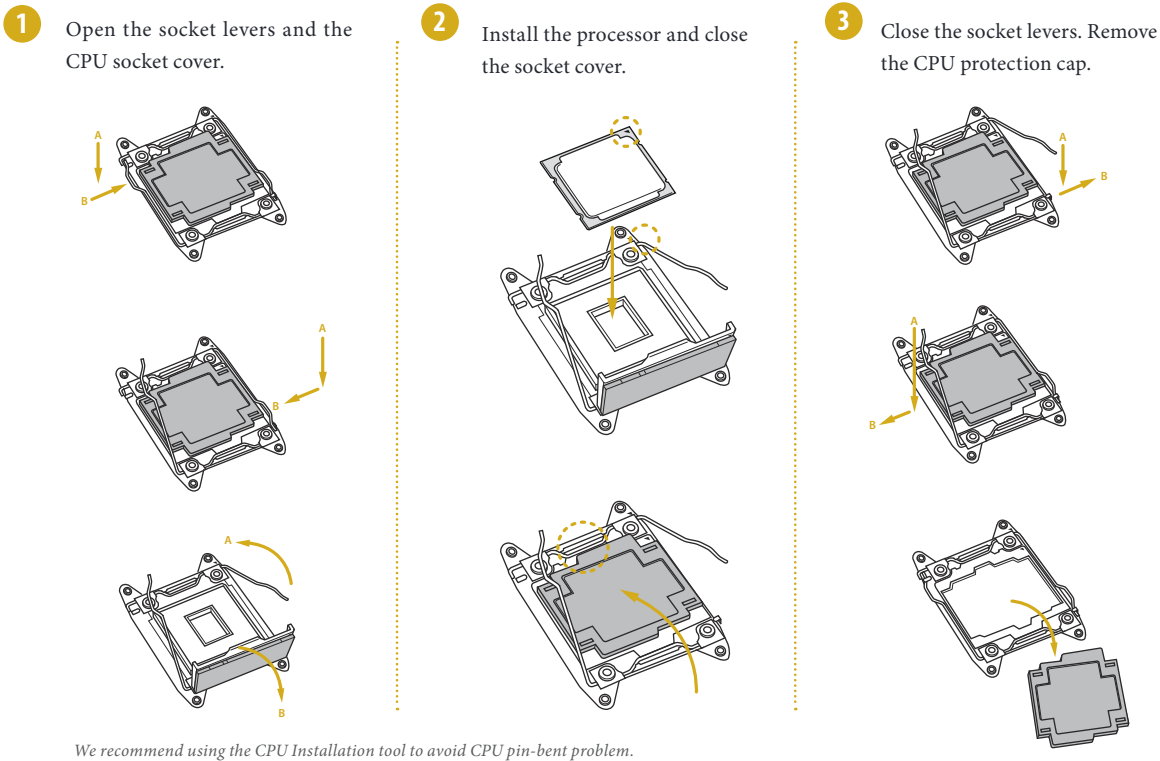- 1 Open the socket levers and the CPU socket cover.
 - 2 Install the processor and close the socket cover.
 - 3 Close the socket levers. Remove the CPU protection cap.
- 


We recommend using the CPU Installation tool to avoid CPU pin-bent problem.

6 Install the CPU Fan and Heatsink

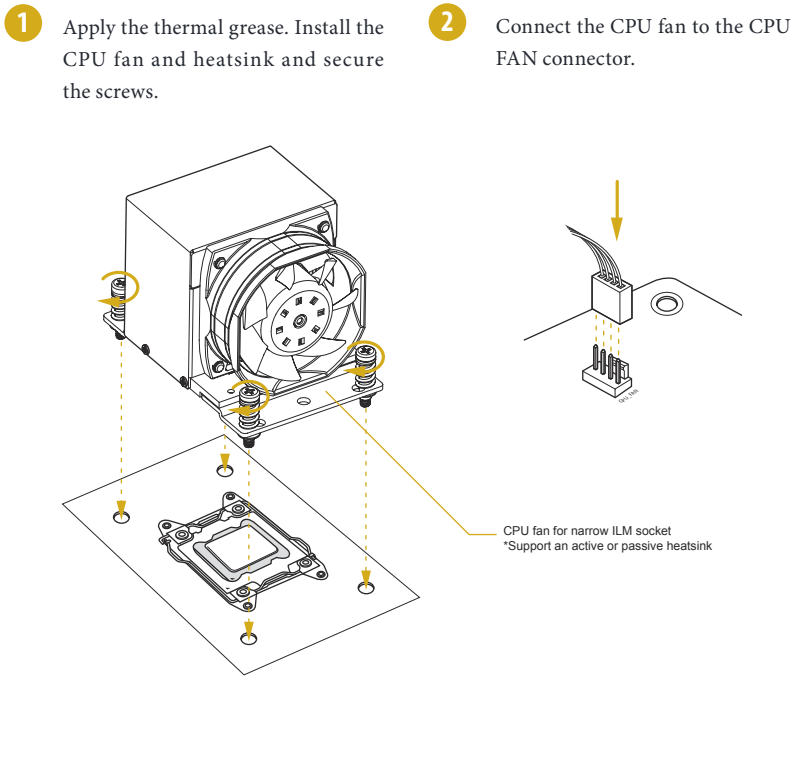- 1 Apply the thermal grease. Install the CPU fan and heatsink and secure the screws.
 - 2 Connect the CPU fan to the CPU FAN connector.
- 


CPU fan for narrow ILM socket
*Support an active or passive heatsink

7 Install the Power Cables

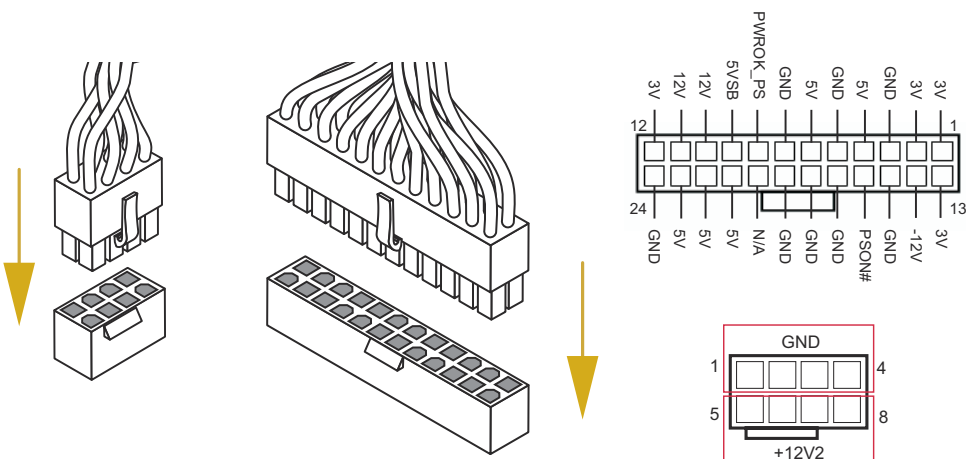


8 LAN Port LED Indications

IPMI LAN Port



Activity / Link LED		Speed LED	
Status	Description	Status	Description
Off	No Link	Off	10Mbps connection
Blinking	Data Activity (100Mbps)	Orange	100Mbps connection
On	Link	Green	1Gbps connection

1G LAN Port




Activity / Link LED		Speed LED	
Status	Description	Status	Description
Off	No Link	Off	10Mbps connection
Blinking	Data Activity	Orange	100Mbps connection
On	Link	Green	1Gbps connection

9 Dr. Debug

Code	Description
00	Please check if the CPU is installed correctly and then clear CMOS.
0d	Problem related to memory, VGA card or other devices. Please clear CMOS, re-install the memory and VGA card, and remove other USB, PCI devices.
01 - 54 (except 0d), 5A - 60	Problem related to memory. Please re-install the CPU and memory then clear CMOS. If the problem still exists, please install only one memory module or try using other memory modules.
55	The Memory could not be detected. Please re-install the memory and CPU. If the problem still exists, please install only one memory module or try using other memory modules.
61 - 91	Chipset initialization error. Please press reset or clear CMOS.
92 - 99	Problem related to PCI-E devices. Please re-install PCI-E devices or try installing them in other slots. If the problem still exists, please remove all PCI-E devices or try using another VGA card.
A0 - A7	Problem related to IDE or SATA devices. Please re-install IDE and SATA devices. If the problem still exists, please clear CMOS and try removing all SATA devices.
b0	Problem related to memory. Please re-install the CPU and memory. If the problem still exists, please install only one memory module or try using other memory modules.
b4	Problem related to USB devices. Please try removing all USB devices.
b7	Problem related to memory. Please re-install the CPU and memory then clear CMOS. If the problem still exists, please install only one memory module or try using other memory modules.
d6	The VGA could not be recognized. Please clear CMOS and try re-installing the VGA card. If the problem still exists, please try installing the VGA card in other slots or use other VGA cards.
d7	The Keyboard and mouse could not be recognized. Please try re-installing the keyboard and mouse.
d8	Invalid Password.
FF	Please check if the CPU is installed correctly and then clear CMOS.


10 Install the PCIE Card

- 1 Remove the bracket facing the slot that you intend to use. Keep the screw for later use.
- 2 Align the card connector with the slot and press firmly until the card is completely seated on the slot.
- 3 Fasten the card to the chassis with the screw.

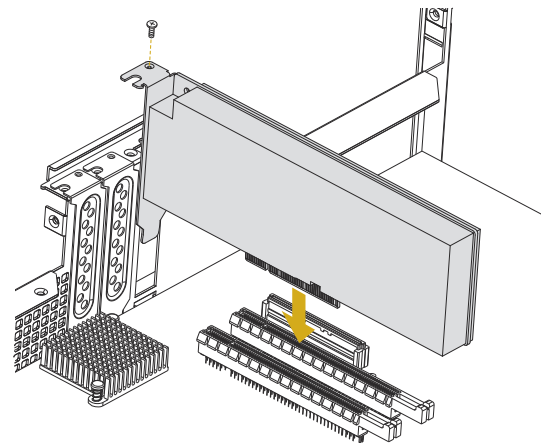


11 Install the Memory

- 1 Unlock a DIMM slot by pressing the module clip outward.
- 2 Insert the memory module.
- 3 Lock the clip.

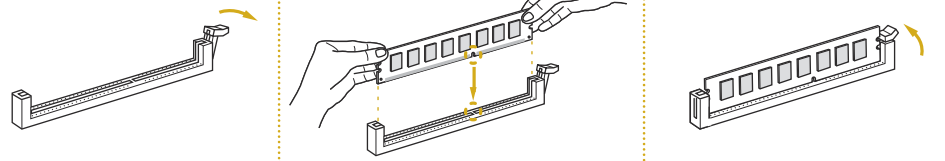


12 Headers


System Panel



Auxiliary Panel



Front Panel Audio



HDMI_SPDIF

