Firmware Update SOP

A) Power on G10 and wait for 90 seconds to make sure G10 is ready。

B) Make sure G10 has internet connection (Solid dark blue LED).

C) Connect your laptop or smart device to G10 through Ethernet cable or WIFI.

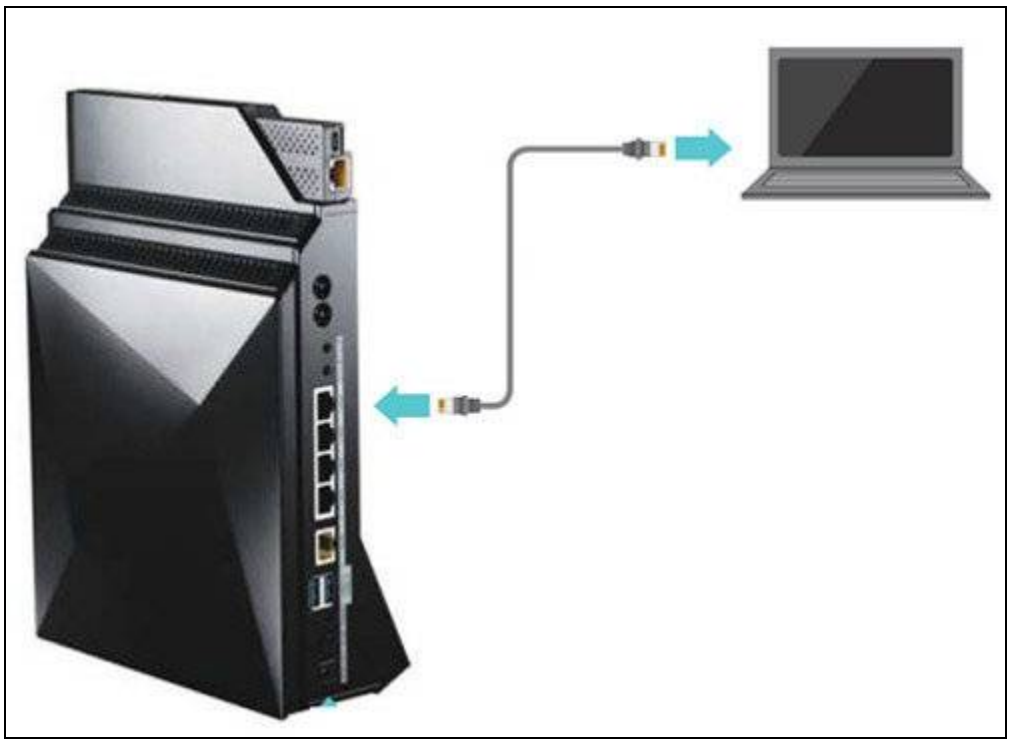

D) Open your browser (Google Chrome or FireFox are preferred) on your client, and then try to access G10's web UI using the URL http://asrock.router or http://192.168.1.1

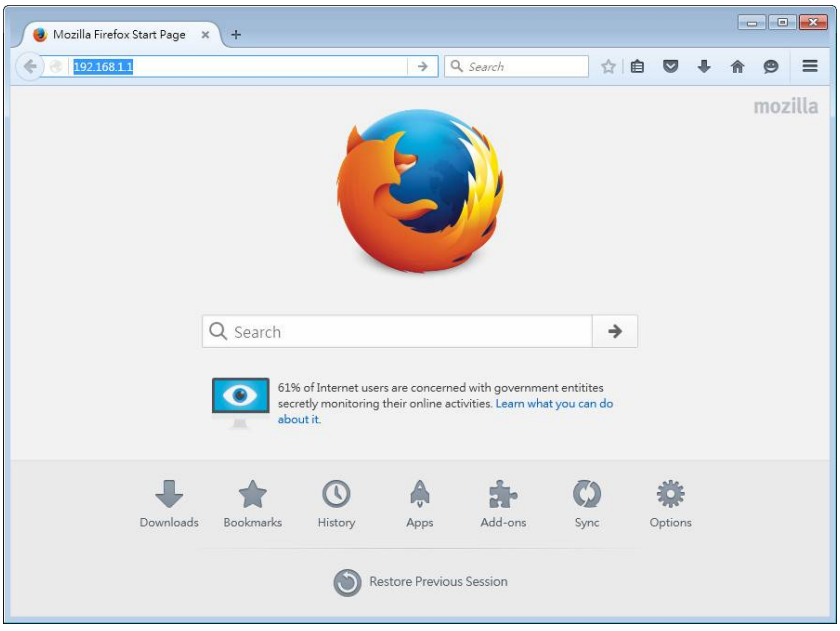

E) Proceed to Advanced settings and try to locate the Administration -> Firmware Upgrade page

Language English
ASRock
G10
Client (10)
USB
WAN
Router
Advanced
Enter
Guest
Parental Control
Lighting
WiFi
OFF
OFF
ON
ON
ASRock

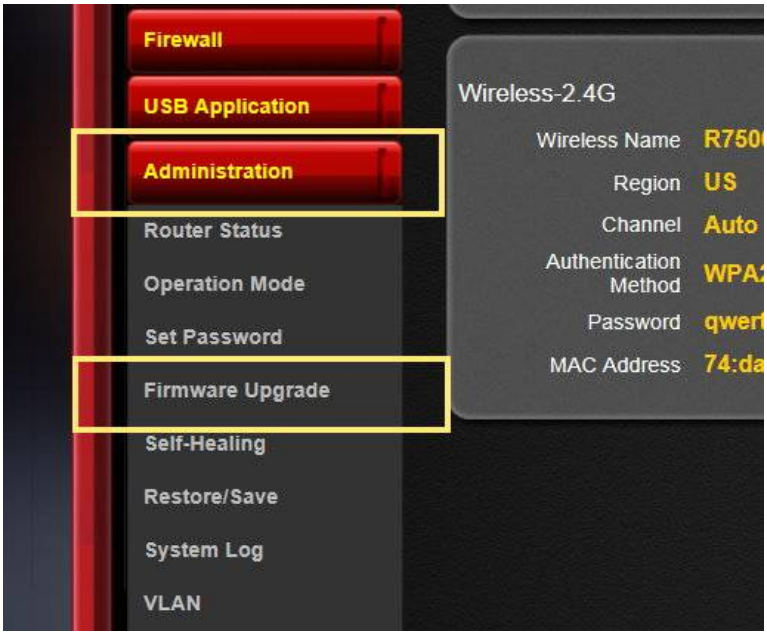
Firewall
USB Application
Administration
Router Status
Operation Mode
Set Password
Firmware Upgrade
Self-Healing
Restore/Save
System Log
VLAN
Wireless-2.4G
Wireless Name
Region
US
Channel
Auto
Authentication Method
Password
MAC Address

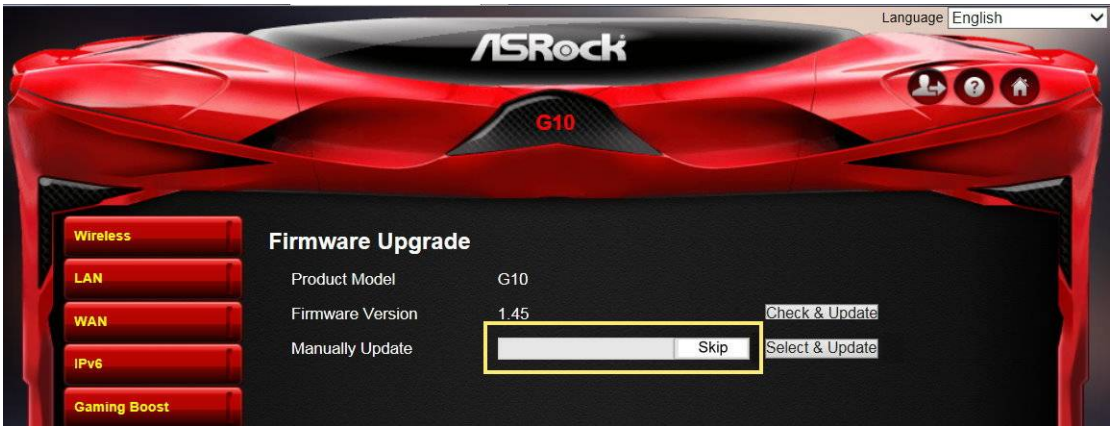

F) Click on the "Check & Update" button and confirm the prompt message

G) G10 will be upgraded to the latest official firmware within about 2 minutes