



# IPMI Configuration Guide

Published March 2014

Copyright©2014 ASRock Rack INC. All rights reserved.

---

## ***Table of Contents***

|                                              |           |
|----------------------------------------------|-----------|
| <b>1. Introduction of Megarac SP.....</b>    | <b>4</b>  |
| <b>2. Megarac SP GUI Overview.....</b>       | <b>5</b>  |
| <b>2.1 Login page.....</b>                   | <b>5</b>  |
| <b>2.2 Dashboard .....</b>                   | <b>6</b>  |
| <b>2.3 Field Replaceable Unit (FRU).....</b> | <b>8</b>  |
| <b>2.4 Server Health.....</b>                | <b>10</b> |
| 2.4.1 Sensor Readings .....                  | 10        |
| 2.4.2 Event Log .....                        | 11        |
| 2.4.3 System and Audit Log.....              | 12        |
| <b>2.5 Configuration.....</b>                | <b>13</b> |
| 2.5.1 Active Directory Settings.....         | 13        |
| 2.5.2 DNS Server Settings .....              | 14        |
| 2.5.3 System Event Log .....                 | 16        |
| 2.5.4 Images Redirection.....                | 17        |
| 2.5.5 LDAP/E-Directory Settings .....        | 18        |
| 2.5.6 Mouse Mode Settings.....               | 19        |
| 2.5.7 Network Settings .....                 | 20        |
| 2.5.8 Network Bonding Configuration.....     | 23        |
| 2.5.9 Network Link Configuration .....       | 24        |
| 2.5.10 NTP Settings.....                     | 25        |
| 2.5.11 PAM Ordering .....                    | 27        |
| 2.5.12 PEF Management.....                   | 28        |
| 2.5.13 RADIUS Settings .....                 | 30        |
| 2.5.14 Configure Remote Session.....         | 32        |
| 2.5.15 Services.....                         | 33        |
| 2.5.16 SMTP Settings.....                    | 34        |
| 2.5.17 SSL Certificate Configuration .....   | 37        |
| 2.5.18 System and Audit Log Settings.....    | 38        |
| 2.5.19 User Management .....                 | 40        |
| 2.5.20 Virtual Media Devices .....           | 41        |

---

|                                      |           |
|--------------------------------------|-----------|
| <b>2.6 Remote Control .....</b>      | <b>42</b> |
| 2.6.1 Console Redirection .....      | 42        |
| 2.6.2 Power Control and Status.....  | 43        |
| 2.6.3 Java SOL.....                  | 44        |
| <b>2.7 Auto Video Recording.....</b> | <b>45</b> |
| 2.7.1 Triggers Configuration .....   | 45        |
| 2.7.2 Video Recording .....          | 46        |
| <b>2.8 Maintenance .....</b>         | <b>47</b> |
| 2.8.1 Preserve Configuration.....    | 47        |
| 2.8.2 Restore Factory Defaults ..... | 48        |
| 2.8.3 System Administrator.....      | 49        |
| <b>2.9 Firmware Update .....</b>     | <b>50</b> |
| 2.9.1 Firmware Update .....          | 50        |
| 2.9.2 Image Transfer Protocol .....  | 51        |

---

## ***1. Introduction of Megarac SP***

Megarac SP allows remote access of computers with BMC (Baseboard Management Controllers) and IPMI (Intelligence Platform Management Interface). System administrators may easily monitor system health or manage computer events of remote computers via the web based Megarac SP GUI using standard Internet browsers.

---

## 2. Megarac SP GUI Overview

### 2.1 Login page

A login form with a light blue border. It contains two input fields: 'Username:' with the text 'admin' and 'Password:' with masked characters '\*\*\*\*\*'. Below the password field is a small blue link that says 'Forgot Password?'. At the bottom of the form is a 'Login' button.

Language: English ▼


#### Required Browser Settings

1. Allow popups from this site ✓
2. Allow file download from this site. (How to ?)
3. Enable javascript for this site ✓
4. Enable cookies for this site ✓

It is recommended not to use Refresh, Back and Forward options of the browser.

The default username and password are both “admin”. It is recommended to change the username and password after your first login.

## 2.2 Dashboard

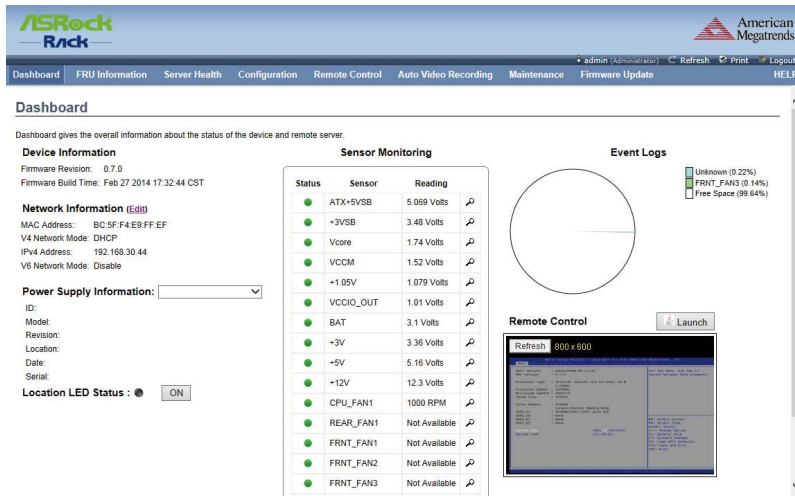

The dashboard displays overall information about the status of the device.

### Device Information

Displays the Firmware Revision and Firmware Build Time (Date and Time).

### Network Information

Shows network settings for the device. Click on the link Edit to view the Network Settings Page.

### Remote Control

Start remote redirection of the host by launching the console from this page. Clicking on the 'Launch' button of the 'Remote Control' will cause the jviewer.jsp file to be downloaded. Once the file is downloaded and launched, a Java redirection window will be displayed.

### Remote Console Preview Box

It will show the console preview of the remote server by using a java application. Click on the 'Refresh' button to reload the console preview.

### Sensor Monitoring

It lists all available sensors on the device, with information such as status,

---

name, reading, and status icon, as well as a link to that sensor's page.

There are 3 possible states for a Sensor:

- Green dot denotes a Normal state.
- Yellow exclamation mark denotes a Warning state.
- Red x denotes a Critical state.

The magnifying glass allows access to the Sensor details page for that sensor.

## **Event Logs**

A graphical representation of all events incurred by the various sensors and %occupied/available space in logs. If you click on the color-coded rectangle in the Legend for the chart, you can view a list of those specific events only.

## 2.3 Field Replaceable Unit (FRU)

**ASRock Rack** American Megatrends

Dashboard FRU Information Server Health Configuration Remote Control Auto Video Recording Maintenance Firmware Update HELP

### Field Replaceable Unit(FRU)

This page gives detailed information for the various FRU devices present in this system.

**Basic Information:**

FRU Device ID

FRU Device Name BMC\_FRU

**Chassis Information:**

Chassis Information Area Format Version 0

Chassis Type

Chassis Part Number

Chassis Serial Number

Chassis Extra

**Board Information:**

Board Information Area Format Version 1

Language 0

Manufacture Date Time Fri Jul 27 15:31:00 2012

Board Manufacturer ASRock

Board Product Name

Board Serial Number

FRU File ID

This page displays the BMC FRU file information. On selecting a particular FRU Device ID its corresponding FRU information will be displayed.

### Basic Information

It displays the FRU device ID and device name for the selected FRU device ID.

### Chassis Information

It displays the following Chassis information fields.

- Area Format Version
- Chassis Type
- Chassis Part Number
- Chassis Serial Number
- Chassis Extra

### Board Information

It displays the following Board information fields.

- Area Format Version
- Language
- Manufacture Date Time
- Board Manufacturer

- 
- Board Product Name
  - Board Serial Number
  - Board Part Number
  - FRU File ID
  - Board Extra

### **Product Information**

It displays the following Product information fields.

- Area Format Version
- Language
- Manufacturer Name
- Product Name
- Product Part Number
- Product Version
- Product Serial Number
- Asset Tag
- FRU File ID
- Product Extra

## 2.4 Server Health

### 2.4.1 Sensor Readings

ASRock Rack

American Megatrends

Dashboard

FRU Information

Server Health

Configuration

Remote Control

Auto Video Recording

Maintenance

Firmware Update

Logout

admin (Administrator)

Refresh

Print

Help

Sensor Readings

All sensor related information will be displayed here. Double click on a record to toggle (ON / OFF) the live widget for that particular sensor.

All Sensors

Sensor Count: 18 sensors

| Sensor Name     | Status | Current Reading |
|-----------------|--------|-----------------|
| ATX+5VSB        | Normal | 5.069 Volts     |
| +3VSB           | Normal | 3.5 Volts       |
| Vcore           | Normal | 1.74 Volts      |
| VCCM            | Normal | 1.52 Volts      |
| +1.05V          | Normal | 1.069 Volts     |
| VCCIO_OUT       | Normal | 1.01 Volts      |
| BAT             | Normal | 3.1 Volts       |
| +3V             | Normal | 3.36 Volts      |
| +5V             | Normal | 5.16 Volts      |
| +12V            | Normal | 12.3 Volts      |
| CPU_FAN1        | Normal | 1000 RPM        |
| REAR_FAN1       | Normal | Not Available   |
| FRNT_FAN1       | Normal | Not Available   |
| FRNT_FAN2       | Normal | Not Available   |
| MB Temperature  | Normal | 40 °C           |
| TRI Temperature | Normal | 0 °C            |
| CPU Temperature | Normal | 38 °C           |

ATX+5VSB: 5.069 Volts

NORMAL

Thresholds for this sensor

LIVE WIDGET Off | On

Lower Non-Recoverable (LNR): 4.049 VoltsUpper Non-Recoverable (UNR): 6.029 Volts

Lower Critical (LC): 4.259 VoltsUpper Critical (UC): 5.759 Volts

Lower Non-Critical (LNC): 4.5 VoltsUpper Non-Critical (UNC): 5.49 Volts

Graphical View of this sensor's events

LNR (0)

LC (0)

UNC (0)

UNR (0)

UC (0)

UNC (0)

Other (0)

Discrete (0)

A list of sensor readings will be displayed here. Click on a record to show more information about that particular sensor, including thresholds and a graphical representation of all associated events. Double click on a record to toggle (ON / OFF) the live widget for that particular sensor. You can filter the list to view particular sensors only using the drop-down listbox.

NOTE: N/A represents Not Applicable.

#### Live Widget

Turn On or Off the live widget for this sensor. This widget gives a dynamic representation of the readings for the sensor.

#### View this Event Log

Click this button to go the event log page for the viewed sensor.

## 2.4.2 Event Log

ASRock Rack

American Megatrends

admin Administrator Refresh Print Logout

Dashboard FRU Information Server Health Configuration Remote Control Auto Video Recording Maintenance Firmware Update HELP

### Event Log

Events generated by the system will be logged here. Double-click on a record to see description.

All Events filter by: All Sensors

BMC Timezone Client Timezone UTC Offset: (GMT+/-0)

Event Log: 13 event entries, 1 page(s)

| Event ID | Time Stamp          | Sensor Name | Sensor Type  | Description                                                                                                                       |
|----------|---------------------|-------------|--------------|-----------------------------------------------------------------------------------------------------------------------------------|
| 13       | 03/03/2014 11:44:15 | Unknown     | System Event | System Reconfigured,OEM System Boot Event,Undetermined System Hardware Failure,Entry Added to Auxiliary Log,PEF Action - Asserted |
| 12       | 03/03/2014 11:44:15 | Unknown     | System Event | System Reconfigured,OEM System Boot Event,Undetermined System Hardware Failure,Entry Added to Auxiliary Log,PEF Action - Asserted |
| 11       | 03/03/2014 03:44:49 | Unknown     | System Event | System Reconfigured,OEM System Boot Event,Undetermined System Hardware Failure,Entry Added to Auxiliary Log,PEF Action - Asserted |
| 10       | 03/03/2014 03:44:49 | Unknown     | System Event | System Reconfigured,OEM System Boot Event,Undetermined System Hardware Failure,Entry Added to Auxiliary Log,PEF Action - Asserted |
| 9        | 02/27/2014 18:22:21 | FRNT_FAN3   | Fan          | Lower Non-Critical - Going Low - Asserted                                                                                         |
| 8        | 02/27/2014 18:22:18 | FRNT_FAN3   | Fan          | Lower Non-Critical - Going Low - Deasserted                                                                                       |
| 7        | 02/27/2014 18:21:04 | FRNT_FAN3   | Fan          | Lower Non-Critical - Going Low - Asserted                                                                                         |
| 6        | 02/27/2014 18:20:59 | FRNT_FAN3   | Fan          | Lower Non-Critical - Going Low - Deasserted                                                                                       |
| 5        | 02/27/2014 18:20:56 | FRNT_FAN3   | Fan          | Lower Non-Critical - Going Low - Asserted                                                                                         |
| 4        | 02/27/2014 18:20:09 | Unknown     | System Event | System Reconfigured,OEM System Boot Event,Undetermined System Hardware Failure,Entry Added to Auxiliary Log,PEF Action - Asserted |
|          |                     |             |              | System Reconfigured,OEM System Boot Event,Undetermined                                                                            |

Clear All Event Logs

This page displays the list of events incurred by different sensors on this device. Double click on a record to see the details of that entry. You can also sort the list of entries by clicking on any of the column headers. You can use the sensor type or sensor name filter options to view those specific events logged in the device.

### BMC Timezone

Check this option to display the event log entries logged with the BMC Timezone value.

### Client Timezone

Check this option to display the event log entries logged with the Client (user's) Timezone value.

### UTC Offset

Displays the current UTC Offset value based on which event Time Stamps will be updated. Navigational arrows can be used to selectively access different pages of the Event Log.

### Clear All Event Logs

Clear All Event Logs option will delete all existing records for all sensors.

## 2.4.3 System and Audit Log

The screenshot shows the ASRock Rack American Megatrends System & Audit Logs interface. The top navigation bar includes links for Dashboard, FRU Information, Server Health, Configuration, Remote Control, Auto Video Recording, Maintenance, Firmware Update, and HELP. The main content area is titled 'System & Audit Logs' and includes a sub-header 'This page displays logs of system and audit events for this device (if the options have been configured)'. Below this, there are two tabs: 'System Log' (selected) and 'Audit Log'. A filter dropdown is set to 'Alert'. The table displays two entries:

| Event ID | Time Stamp     | HostName        | Description                                         |
|----------|----------------|-----------------|-----------------------------------------------------|
| 1        | Mar 3 03:16:48 | AMIBC5FF4E9FFEF | kernel: Helper Module Driver Version 1.2            |
| 2        | Mar 3 03:16:48 | AMIBC5FF4E9FFEF | kernel: Copyright (c) 2006 American Megatrends Inc. |

UTC Offset: (GMT+/-0) This Filter: 2 event entries

If configured, these logs will display all the system and audit events that occurred on this device.

*NOTE: Logs have to be configured under 'Configuration -> System and Audit Log' in order to display entries.*

### System Log

Click the System Log tab to view all system events. Entries can be filtered based on their classification levels.

### Audit Log

Click the Audit Log tab to view all audit events for this device.

## 2.5 Configuration

### 2.5.1 Active Directory Settings

The 'Active Directory Settings' page in the ASRock Rack BIOS/UEFI interface. The page shows a table of configured role groups. The table has columns for Role Group ID, Group Name, Group Domain, and Group Privilege. There are 5 rows in the table, with the first row containing data and the others being empty slots. The status of the Active Directory is 'disabled'. The page also includes buttons for 'Advanced Settings', 'Add Role Group', 'Modify Role Group', and 'Delete Role Group'.

| Role Group ID | Group Name | Group Domain | Group Privilege |
|---------------|------------|--------------|-----------------|
| 1             | ~          | ~            | ~               |
| 2             | ~          | ~            | ~               |
| 3             | ~          | ~            | ~               |
| 4             | ~          | ~            | ~               |
| 5             | ~          | ~            | ~               |

The displayed table shows current configured Role Groups and the available slots. You can modify, add or delete role groups from here. Group domain can be the AD domain or a trusted domain. Group Name should correspond to the name of an actual AD group. To view the page, you must be at least a User. To modify or add a group, you must be an Administrator.

*NOTE: Free slots are denoted by “~” in all columns for the slot.*

#### Advanced Settings

Click this option to configure the Active Directory Settings. Options are Enable Active Directory Authentication, User Domain name, Time Out and up to three Domain Controller Server Addresses.

#### Add Role Group

Select a free slot and click 'Add Role Group' to add a new role group to the device. Alternatively, double click on a free slot to add a role group.

#### Modify Role Group

Select a configured slot and click 'Modify Role Group' to modify that role group. Alternatively, double click on the configured slot.

#### Delete Role Group

Select the desired role group to be deleted and click 'Delete Role Group'.

## 2.5.2 DNS Server Settings

**ASRock Rack** American Megatrends

Dashboard FRU Information Server Health **Configuration** Remote Control Auto Video Recording Maintenance Firmware Update HELP

### DNS Server Settings

Manage DNS settings of the device.

**Host Configuration**

Host Settings: Automatic

Host Name: AMBCSF4E9FFE

**Register BMC**

bond0

☒ Register BMC

☒ Direct Dynamic DNS ☐ DHCP Client FQDN

**Domain Name Configuration**

Domain Settings: bond0\_v4

Domain Name:

**Domain Name Server Configuration**

DNS Server Settings: bond0

IP Priority: ☒ IPv4 ☐ IPv6

DNS Server1: 168.95.1.1

DNS Server2: 168.95.192.1

DNS Server3:

Save Reset

This page is used to configure the Host name and Domain Name Server configuration of the device.

### **Host configuration**

#### **Host Settings**

Choose either Automatic or Manual settings.

#### **Host Name**

It displays the hostname of the device if Auto is selected. If the Host setting is chosen as Manual, then specify the hostname of the device.

#### **Register BMC**

Choose the BMC's network port to register with the DNS settings. Check the option 'Register BMC' to register with the DNS settings. Choose the option 'Direct Dynamic DNS' to register with direct dynamic DNS or choose 'DHCP Client FQDN' to register through a DHCP server.

### **Domain Name Configuration**

#### **Domain Settings**

It lists the options for the domain interface as Manual, v4 or v6 for multi LAN channels.

---

## **Domain Name**

It displays the domain name of the device if Auto is selected. If the Domain setting is chosen as Manual, then specify the domain name of the device.

## **Domain Name Server Configuration**

### **DNS Server Settings**

It lists the options for the DNS interface, Manual and available LAN interfaces.

### **IP Priority**

If the IP Priority is IPv4, it will have 2 IPv4 DNS servers and 1 IPv6 DNS server. If the IP Priority is IPv6, it will have 2 IPv6 DNS servers and 1 IPv4 DNS server.

*NOTE: This is not applicable for Manual configuration.*

### **DNS Server 1, 2 & 3**

Specify the DNS (Domain Name System) server address to be configured for the BMC.

- An IPv4 Address is made of 4 numbers separated by dots as in "xxx.xxx.xxx.xxx".
- Each number ranges from 0 to 255.
- The first number must not be 0.

DNS Server Address will support the following:

- IPv4 Address format.
- IPv6 Address format.

### **Save**

Click 'Save' to save any changes made. You will be logged out of current UI session and will need to log back in.

### **Reset**

Reset the modified changes.

---

## 2.5.3 System Event Log

The screenshot shows the ASRock Rack web interface. The top navigation bar includes links for Dashboard, FRU Information, Server Health, Configuration, Remote Control, Auto Video Recording, Maintenance, Firmware Update, and HELP. The 'Configuration' tab is active. The page title is 'System Event Log'. Below the title, a message states: 'This page is used to configure the System Event log information.' The current setting is 'Current Event Log Policy : LINER'. There are two radio button options: 'Enable Linear Event Log Policy' (which is selected) and 'Enable Circular Event Log Policy'. At the bottom right, there are 'Save' and 'Reset' buttons.

This page is used to configure the System Event log information.

### Current Event Log Policy

It will display the configured Event Log Policy.

#### Linear Event Log Policy

Check this option to enable the Linear System Event Log Policy for the Event Log.

#### Circular Event Log Policy

Check this option to enable the Circular System Event Log Policy for the Event Log.

### Save

Click 'Save' to save the configured settings.

### Reset

Click 'Reset' to reset the modified changes.

## 2.5.4 Images Redirection



ASRock Rack American Megatrends

Dashboard FRU Information Server Health Configuration Remote Control Auto Video Recording Maintenance Firmware Update HELP

### Images Redirection

Remote Media is used to mount the images from remote system and perform redirection. Remote Media is currently disabled. To configure Remote Media Settings: Click on 'Advanced Settings' button. [Advanced Settings](#)

Number of available Images: 0

| # | Image Type | Image Name | Redirection Status |
|---|------------|------------|--------------------|
| 1 | Floppy     | ~          | ~                  |
| 2 | CD/DVD     | ~          | ~                  |
| 3 | Harddisk   | ~          | ~                  |

[Start Redirection](#) [Add Image](#) [Replace Image](#) [Delete Image](#)

The displayed table shows configured images on BMC. You can add or replace the images from here to the remote media. Only one image can be configured for each image type. To configure the image, You need to enable Remote Media support using 'Advanced Settings'. To add or replace an image, you must have Administrator Privileges.

*NOTE: Free slots are denoted by "~".*

### Start/Stop Redirection

Select a configured slot and click 'Start Redirection' to start the remote media redirection. It is a toggle button, if the image is successfully redirected, then click the 'Stop Redirection' button to stop the remote media redirection.

### Add Image

Select a free slot and click 'Add Image' to configure a new image to the device. Alternatively, double click on a free slot to add an image.

### Replace Image

Select a configured slot and click 'Replace Image' to replace the existing image. Alternatively, double click on the configured slot.

### Delete Image

Select the desired image to be deleted and click 'Delete Image'.

*NOTE: Redirection needs to be stopped to replace or delete the image.*

## 2.5.5 LDAP/E-Directory Settings

ASRock Rack American Megatrends

Dashboard FRU Information Server Health Configuration Remote Control Auto Video Recording Maintenance Firmware Update HELP

### LDAP/E-Directory Settings

LDAP/E-Directory is currently disabled. To enable LDAP/E-Directory and configure its settings, Click on 'Advanced Settings' button.

The list below shows the current list of configured Role Groups. If you would like to delete or modify a role group, select the name in the list and press Delete Role Group or Modify Role Group. To add a new Role Group, select an unconfigured slot and press Add Role Group.

Number of configured Role groups: 0

| Role Group ID | Group Name | Group Search Base | Group Privilege |
|---------------|------------|-------------------|-----------------|
| 1             | ~          | ~                 | ~               |
| 2             | ~          | ~                 | ~               |
| 3             | ~          | ~                 | ~               |
| 4             | ~          | ~                 | ~               |
| 5             | ~          | ~                 | ~               |

Add Role Group Modify Role Group Delete Role Group

The displayed table shows the configured Role Groups and available slots. You can modify or add/delete role groups from here. The Group Search Base can be any path from where a Group is located to the Base DN. The Group Name should correspond to the name of an actual LDAP/E-Directory group. To view the page, the user must at least be a User. To modify or add a group, the user must be an Administrator.

*NOTE: Free slots are denoted by “~” in all columns for the slot.*

### Advanced Settings

Click this option to configure LDAP/E-Directory Advanced Settings. Options are Enable LDAP/E-Directory Authentication, IP Address, Port, Bind DN, Password and Search base.

### Add Role Group

Select a free slot and click 'Add Role Group' to add a new role group to the device. Alternatively, double click on a free slot to add a role group.

### Modify Role Group

Select a configured slot and click 'Modify Role Group' to modify that role group. Alternatively, double click on the configured slot.

### Delete Role Group

Select the desired role group to be deleted and click 'Delete Role Group'.

## 2.5.6 Mouse Mode Settings

The screenshot shows the ASRock Rack American Megatrends BIOS interface. The top navigation bar includes links for Dashboard, FRU Information, Server Health, Configuration, Remote Control, Auto Video Recording, Maintenance, Firmware Update, and HELP. The user is logged in as 'admin (Administrator)'. The 'Configuration' tab is selected, and the 'Mouse Mode Settings' page is displayed. A note states: 'Redirection console mouse mode settings can be modified here.' The current mode is 'ABSOLUTE'. Three radio buttons are available: 'Set Mode to Relative (Recommended when server OS is Linux)', 'Set Mode to Absolute (Recommended when server OS is Windows)', and 'Set Mode to Other Mode (Recommended for SLES-11 OS Installation)'. At the bottom right are 'Save' and 'Reset' buttons.

The Redirection Console handles mouse emulation from the local window to the remote screen using either of the two methods. Only 'Administrator' has the right to configure these options.

- Relative Mouse mode
- Absolute Mouse mode
- Other Mouse mode

### Relative Mouse mode

The Relative mode sends the calculated relative mouse position displacement to the server. To select this mode select the "Set mode to Relative" option.

### Absolute Mouse mode

The absolute position of the local mouse is sent to the server. To select this mode select the "Set mode to Absolute" option.

### Other Mouse mode

Select Other Mode to have the calculated displacement from the local mouse in the centre position, sent to the server. Use this mode for SLES 11 Linux OS installation.

### Save

Click 'Save' to save any changes made.

### Reset

Click 'Reset' to reset the modified changes.

## 2.5.7 Network Settings

The screenshot displays the 'Network Settings' page of the ASRock Rack American Megatrends BIOS. The page is organized into several sections for configuring network parameters.

**Manage network settings of the device:**

- LAN Interface:** A dropdown menu showing 'bond0'.
- LAN Settings:** A checkbox labeled 'Enable' which is checked.
- MAC Address:** A text field displaying 'BC:5F:F4:E9:FF:EF'.

**IPv4 Configuration:**

- Obtain an IP address automatically:** A checkbox labeled 'Use DHCP' which is checked.
- IPv4 Address:** A text field displaying '192.168.30.44'.
- Subnet Mask:** A text field displaying '255.255.255.0'.
- Default Gateway:** A text field displaying '192.168.30.1'.

**IPv6 Configuration:**

- IPv6 Settings:** A checkbox labeled 'Enable' which is unchecked.
- Obtain an IP address automatically:** A checkbox labeled 'Use DHCP' which is unchecked.
- IPv6 Address:** An empty text field.
- Subnet Prefix length:** A text field displaying '0'.
- Default Gateway:** An empty text field.

**VLAN Configuration:**

- VLAN Settings:** A checkbox labeled 'Enable' which is unchecked.

This page is used to configure the network settings for available LAN channels.

### LAN Interface

Select the LAN interface to be configured.

### LAN Settings

Check this option to enable LAN support for the selected interface.

### MAC Address

This field displays the MAC address of the selected interface (read only).

### IPv4 Configuration

It lists the IPv4 configuration settings.

#### Obtain an IP address automatically

Enable 'Use DHCP' to dynamically configure the IPv4 address using Dynamic Host Configuration Protocol (DHCP).

#### IPv4 Address, Subnet Mask, Default Gateway

If DHCP is disabled, specify a static IPv4 address, Subnet Mask and

---

Default Gateway to be configured for the selected interface.

- An IP Address consists of 4 sets of numbers separated by dots as in "xxx.xxx.xxx.xxx".
- Each set ranges from 0 to 255.
- The first Number must not be 0.

### **IPv6 Configuration**

It lists the IPv6 configuration settings.

#### **IPv6 Settings**

Check this option to enable IPv6 support for the selected interface.

#### **Obtain an IP address automatically**

Enable 'Use DHCP' to dynamically configure the IPv4 address using Dynamic Host Configuration Protocol (DHCP).

#### **IPv6 Address**

Specify a static IPv6 address to be configured for the selected interface.

#### **Subnet Prefix length**

Specify the subnet prefix length for the IPv6 settings.

- Value ranges from 0 to 128.

#### **Default Gateway**

Specify the v6 default gateway for IPv6 settings.

### **VLAN Configuration**

It lists the VLAN configuration settings.

#### **VLAN Settings**

Check this option to enable VLAN support for the selected interface.

#### **VLAN ID**

Specify the Identification for VLAN configurations.

- Value ranges from 2 to 4094.

*NOTE: VLAN ID cannot be changed without resetting the VLAN configuration. VLAN ID 0, 1, 4095 are reserved VLAN ID's.*

#### **VLAN Priority**

Specify the priority for VLAN configurations.

- Value ranges from 1 to 7.

*NOTE: 7 is the highest priority for VLAN.*

---

**Save**

Click 'Save' to save any changes made. You will be prompted to log out of the current UI session and log back in at the new IP address.

**Reset**

Click 'Reset' to reset the modified changes.

## 2.5.8 Network Bonding Configuration

The screenshot shows the ASRock Rack American Megatrends BIOS interface. The top navigation bar includes links for Dashboard, FRU Information, Server Health, Configuration (selected), Remote Control, Auto Video Recording, Maintenance, Firmware Update, and HELP. The main title is "Network Bonding Configuration". Below it, a message states: "The following options are to configure networking bonding for the device." The configuration options are: "Network Bonding" with a checked checkbox and "Enable" text; "Default Interfaces" with a dropdown menu showing "both"; and "Auto Configuration" with a checked checkbox and "Enable" text. At the bottom right, there are "Save" and "Reset" buttons.

This page is used to configure the network bonding configuration for network interfaces.

*NOTE: A minimum of 2 network interfaces are required to enable Network bonding for the device.*

### Network Bonding

Check this option to enable network bonding for network interfaces.

*NOTE: If VLAN is enabled for slave interfaces, then Bonding cannot be enabled. VLAN can be disabled under Configuration -> Network -> VLAN.*

### Default Interfaces

Choose any one of the bonding interfaces for configuring active slave(s).

### Auto Configuration

Enable this option to configure the interfaces in service configuration automatically.

*NOTE: If Auto configuration is disabled, then interfaces in services can be configured via IPMI command. If Auto configuration is enabled, then all the services will be restarted automatically.*

### Save

Click "Save" to save the current changes.

*NOTE: Disabling bonding will disable the Bonding-VLAN configuration.*

---

## **Reset**

Click “Reset” to reset the modified changes.

---

## 2.5.9 Network Link Configuration

The screenshot shows the ASRock Rack American Megatrends BIOS interface. The top navigation bar includes links for Dashboard, FRU Information, Server Health, Configuration (selected), Remote Control, Auto Video Recording, Maintenance, Firmware Update, and HELP. The Configuration page is titled 'Network Link Configuration'. Below the title, it says 'Manage network link settings of the device.' The settings are as follows: LAN Interface is set to 'eth0' (dropdown); Auto Negotiation is set to 'ON' (radio buttons); Link Speed is set to '100 Mbps' (dropdown); and Duplex Mode is set to 'Full Duplex' (dropdown). At the bottom right, there are 'Save' and 'Reset' buttons.

This page is used to configure the network link configuration for available network interfaces.

### LAN Interface

Select the required network interface from the list to which the Link speed and duplex mode is to be configured.

### Auto Negotiation

This option is enabled to allow the device to perform automatic configuration to achieve the best possible mode of operation (speed and duplex) over a link.

### Link Speed

Link speed will list all the supported capabilities of the network interface. It can be 10/100/1000 Mbps.

### Duplex Mode

Select any one of the following Duplex Modes.

- Half Duplex
- Full Duplex

### Save

Click 'Save' to save the settings.

### Reset

Click 'Reset' to reset the modified changes.

## 2.5.10 NTP Settings

**ASRock Rack** American Megatrends

admin (Administrator) Refresh Print Logout

Dashboard FRU Information Server Health **Configuration** Remote Control Auto Video Recording Maintenance Firmware Update HELP

### NTP Settings

Here you can either configure the NTP server or view and modify the device's Date & Time settings.

**Date:** March 3 2014

**Time:** (hh:mm:ss) 11 52 49

**UTC Timezone:** (GMT+/-0) Hour(s)

**NTP Server:** pool.ntp.org

☒ Automatically synchronize Date & Time with NTP Server

Refresh Save Reset

This page displays the device's current Date & Time Settings. It can be used to configure either Date & Time or NTP (Network Time Protocol) server settings for the device.

### Date

Specify the current Date for the device.

### Time

Specify the current Time for the device.

*NOTE: As a year 2038 problem exists, the acceptable date range is from 01-01-2005 to 01-18-2038.*

### NTP Server

Specify the NTP Server for the device. Check the 'Automatically synchronize' option to configure the NTP Server. The NTP Server will support the following:

- IP Address (Both IPv4 and IPv6 format).
- FQDN (Fully qualified domain name) format.

### UTC Offset

UTC Offset list contains the UTC offset values for the NTP server, which can be used to display the exact local time.

*NOTE: Use the correct UTC offset after adjusting for DST.*

---

**Automatically synchronize**

Check this option to automatically synchronize Date and Time with the NTP Server.

**Refresh**

Click 'Refresh' to reload the current date & time settings.

**Save**

Click 'Save' to save any changes made.

**Reset**

Click 'Reset' to reset the modified changes.

## 2.5.11 PAM Ordering

The screenshot shows the iSRock Rack web interface. The top navigation bar includes links for Dashboard, FRU Information, Server Health, Configuration, Remote Control, Auto Video Recording, Maintenance, Firmware Update, and HELP. The user is logged in as 'admin (Administrator)'. The main content area is titled 'PAM Ordering' and contains a sub-header: 'This page is used to configure the PAM Ordering for the user authentication.' Below this, there is a list of PAM modules: 'IPMI', 'LDAP', and 'Active Directory'. To the right of the 'LDAP' module are two buttons: 'Move Up' (upward arrow) and 'Move Down' (downward arrow). At the bottom right of the page are 'Save' and 'Reset' buttons.

This page is used to configure the PAM order for user authentication into the BMC.

### PAM Module

It shows the list of available PAM modules supported in BMC.

### Move Up

Click on the required PAM module, it will be selected. Click on the 'Move Up' option to move the selected PAM module one step before the existing PAM module.

### Move Down

Click on the required PAM module, it will be selected. Click on the 'Move Down' option to move the selected PAM module one step after the existing PAM module.

### Save

Click 'Save' to save any changes made.

*NOTE: Whenever the configuration is modified, the web server will be restarted automatically. The logged session will be logged out.*

### Reset

Click 'Reset' to reset the modified changes.

## 2.5.12 PEF Management



admin (Administrator) Refresh Print Logout

Dashboard FRU Information Server Health Configuration Remote Control Auto Video Recording Maintenance Firmware Update HELP

### PEF Management

Use this page to configure Event Filter, Alert Policy and LAN Destination. To delete or modify a entry, select it in the list and press "Delete" or "Modify". To add a new entry, select an unconfigured slot and press "Add".

Event Filter Alert Policy LAN Destination

Configured Event Filter count: 13

| PEF ID | Filter Configuration | Event Filter Action | Event Severity | Sensor Name |
|--------|----------------------|---------------------|----------------|-------------|
| 1      | ~                    | ~                   | ~              | ~           |
| 2      | ~                    | ~                   | ~              | ~           |
| 3      | Enabled              | [Alert]             | Unspecified    | Any         |
| 4      | Enabled              | [Alert]             | Unspecified    | Any         |
| 5      | Enabled              | [Alert]             | Unspecified    | Any         |
| 6      | Enabled              | [Alert]             | Unspecified    | Any         |
| 7      | Enabled              | [Alert]             | Unspecified    | Any         |
| 8      | Enabled              | [Alert]             | Unspecified    | Any         |
| 9      | Enabled              | [Alert]             | Unspecified    | Any         |
| 10     | Enabled              | [Alert]             | Unspecified    | Any         |
| 11     | Enabled              | [Alert]             | Unspecified    | Any         |
| 12     | Enabled              | [Alert]             | Unspecified    | Any         |
| 13     | Enabled              | [Alert]             | Unspecified    | Any         |
| 14     | Enabled              | [Alert]             | Unspecified    | Any         |
| 15     | Enabled              | [Alert]             | Unspecified    | Any         |
| 16     | ~                    | ~                   | ~              | ~           |

Add Modify Delete

This page is used to configure the Event Filter, Alert Policy and LAN Destination. To view the page, the user must at least be an Operator. To modify or add a PEF, the user must be an Administrator.

*NOTE: Free slots are denoted by '~' in all columns for the slot. For more information, refer the Platform Event Filtering (PEF) section in IPMI Specification.*

### Event Filter

Click the Event Filter tab to show configured Event filters and available slots. You can modify or add new event filter entries here. A maximum of 40 slots are available and include the default of 15 event filter configurations.

### Alert Policy

Click the Alert policy tab to show configured Alert policies and available slots. You can modify or add new alert policy entries here. A maximum of 60 slots are available.

### LAN Destination

Click the LAN Destination tab to show configured LAN destinations and available slots. You can modify or add new LAN destination entries here. A maximum of 15 slots are available.

---

### **Send Test Alert**

Select a configured slot in the LAN Destination tab and click 'Send Test Alert' to send a sample alert to the configured destination.

*NOTE: Test alerts can be sent only with SMTP configurations set to enabled. SMTP support can be enabled under Configuration->SMTP.*

### **Add**

Select a free slot and click 'Add' to add a new entry to the device. Alternatively, double click on a free slot.

### **Modify**

Select a configured slot and click 'Modify' to modify that entry. Alternatively, double click on the configured slot.

### **Delete**

Select the desired configured slot to be deleted and click 'Delete'.

## 2.5.13 RADIUS Settings

**RADIUS Settings**

Check the box below to enable RADIUS authentication and enter the required information to access the RADIUS server. Press the Save button to save your changes.

RADIUS Authentication ☐ Enable

Port

Time Out  seconds

Server Address

Secret

To enable/disable RADIUS, check or uncheck the “RADIUS Authentication” Enable checkbox respectively.

*NOTE: Generic FreeRADIUS alone is supported.*

### RADIUS Authentication

Check the option ‘Enable’ to enable RADIUS authentication.

### Port

Specify the RADIUS Port.

- The default Port is 1812.
- Port value ranges from 1 to 65535.

### Time Out

Specify the Time out value.

- The default Time out value is 3 seconds.
- Time out value ranges from 3 to 300.

### Server Address

Enter the ‘IP address’ of the RADIUS server

- An IP Address is made of 4 numbers separated by dots as in “xxx.xxx.xxx.xxx”.
- Each Number ranges from 0 to 255.
- The first Number must not be 0.

---

The server address will support the following:

- IPv4 Address format.
- IPv6 Address format.

### **Secret**

Enter the 'Authentication Secret' for RADIUS server

- Secret must be at least 4 characters long.
- Space is not allowed.

*NOTE: This field will not allow more than 31 characters.*

### **Save**


Click 'Save' to save the settings.

### **Reset**

Click 'Reset' to reset the modified changes.

---

## 2.5.14 Configure Remote Session

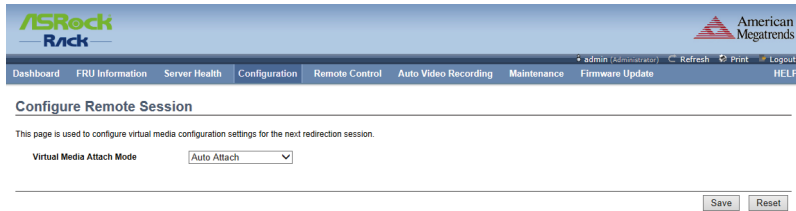

ASRock Rack American Megatrends

Dashboard FRU Information Server Health Configuration Remote Control Auto Video Recording Maintenance Firmware Update HELP

### Configure Remote Session

This page is used to configure virtual media configuration settings for the next redirection session.

Virtual Media Attach Mode

Save Reset

This page is used to configure virtual media configuration settings for the next redirection session.

### Virtual Media Attach Mode

Two types of VM attach modes are available:

- Attach - Immediately attaches Virtual Media to the server upon bootup.
- Auto Attach - Attaches Virtual Media to the server only when a virtual media session is started.

### Save

Click 'Save' to save the current changes.

*NOTE: It will automatically close the existing remote redirection either KVM or Virtual media sessions, if any.*

### Reset

Click 'Reset' to reset the modified changes.

## 2.5.15 Services



admin (Administrator) Refresh Print Logout

DashboardFRU InformationServer HealthConfigurationRemote ControlAuto Video RecordingMaintenanceFirmware UpdateHELP

### Services

Below is a list of services running on the BMC. It shows current status and other basic information about the services. Select a slot and press "Modify" button to modify the services configuration.

Number of Services: 7

| # | Service Name | Current State | Interfaces | Nonsecure Port | Secure Port | Timeout | Maximum Sessions | Active Sessions |
|---|--------------|---------------|------------|----------------|-------------|---------|------------------|-----------------|
| 1 | web          | Active        | bond0      | 80             | 443         | 1800    | 20               | 5               |
| 2 | lvm          | Active        | bond0      | 7578           | 7582        | N/A     | 2                | 0               |
| 3 | cd-media     | Active        | bond0      | 5120           | 5124        | N/A     | 1                | 0               |
| 4 | ls-media     | Active        | bond0      | 5122           | 5126        | N/A     | 1                | 0               |
| 5 | hd-media     | Active        | bond0      | 5123           | 5127        | N/A     | 1                | 0               |
| 6 | ssh          | Active        | N/A        | N/A            | 22          | 600     | N/A              | N/A             |
| 7 | telnet       | Active        | N/A        | 23             | N/A         | 600     | N/A              | N/A             |

Modify

This page is used to display the basic information about services running in the BMC. To modify a service, the user must be an Administrator.

### Modify

Select a slot and click 'Modify' to modify the configuration of the service. Alternatively, double click on the slot.

*NOTE: Whenever the configuration is modified, the service will be restarted automatically. Users have to close the existing opened session for the service if needed.*

## 2.5.16 SMTP Settings

The screenshot shows the ASRock Rack American Megatrends BIOS Setup Utility. The top navigation bar includes links for Dashboard, FRU Information, Server Health, Configuration, Remote Control, Auto Video Recording, Maintenance, Firmware Update, and HELP. The 'Configuration' tab is selected. The main title is 'SMTP Settings'. Below the title, it says 'Manage SMTP settings of the device.' The settings are organized into three sections: LAN Channel Number, Primary SMTP Server, and Secondary SMTP Server. Each section has a 'SMTP Support' checkbox (checked for 'Enable') and a 'Server Address' text field. The Primary and Secondary SMTP Server sections also have an 'SMTP Server requires Authentication' checkbox (unchecked) and 'User Name' and 'Password' text fields. The LAN Channel Number is set to '1' in a dropdown menu.

**SMTP Settings**

Manage SMTP settings of the device.

LAN Channel Number: 1

Sender Address: [Text Field]

Machine Name: [Text Field]

**Primary SMTP Server**

SMTP Support: ☒ Enable

Server Address: [Text Field]

☐ SMTP Server requires Authentication

User Name: [Text Field]

Password: [Text Field]

**Secondary SMTP Server**

SMTP Support: ☒ Enable

Server Address: [Text Field]

☐ SMTP Server requires Authentication

User Name: [Text Field]

Password: [Text Field]

This page is used to configure the SMTP settings.

### LAN Channel Number

Select the LAN channel to which the SMTP information needs to be configured.

### Sender Address

Enter the 'Sender Address' valid on the SMTP Server.

### Machine Name

Enter the 'Machine Name' of the SMTP Server.

- Machine Name is a string of maximum 15 alpha-numeric characters.
- Space, special characters are not allowed.

### Primary SMTP Server

It lists the Primary SMTP Server configuration.

### SMTP Support

Check this option to enable SMTP support for the BMC.

---

## Server Address

Enter the 'IP address' of the SMTP Server. It is a mandatory field.

- An IP Address is made of 4 numbers separated by dots as in "xxx.xxx.xxx.xxx".
- Each Number ranges from 0 to 255.
- The first Number must not be 0.

The server address will support the following:

- IPv4 Address format.
- IPv6 Address format.

## SMTP Server requires Authentication

Check the option 'Enable' to enable SMTP Authentication.

*Note: SMTP Server Authentication Types supported are:*

- CRAM-MD5
- LOGIN
- PLAIN

*If the SMTP server does not support any one of the above authentication types, the user will get an error message stating, "Authentication type is not supported by SMTP Server"*

## Username

Enter the username to access SMTP Accounts.

- The User Name can be 4 to 64 alpha-numeric characters.
- It must start with an alphabet.
- Special characters ',' (comma), ':' (colon), ';' (semicolon), ' ' (space) and '\' (backslash) are not allowed.

## Password

Enter the password for the SMTP User Account.

- Passwords must be at least 4 characters long.
- Space is not allowed.

*NOTE: This field will not allow more than 64 characters.*

---

### **Secondary SMTP Server**

It lists the Secondary SMTP Server configuration. It is an optional field. If the Primary SMTP server is not working, then it tries the Secondary SMTP Server configuration.

### **Save**

Click 'Save' to save the new SMTP server configuration.

### **Reset**

Click 'Reset' to reset the modified changes.

## 2.5.17 SSL Certificate Configuration

**ASRock Rack** American Megatrends

Dashboard FRU Information Server Health **Configuration** Remote Control Auto Video Recording Maintenance Firmware Update HELP

**SSL Certificate Configuration**

This page is used to configure SSL certificate into the BMC. Using this, the device can be accessed in a secured mode. Upload SSL option is used to upload the certificate and private key file into the BMC. Generate SSL option is used to generate the SSL certificate based on configuration details. View SSL option is used to view the uploaded SSL certificate in readable format.

Upload SSL Generate SSL View SSL

Current Certificate Thu Jan 1 00:00:00 1970

New Certificate  浏览

Current Privacy Key Thu Jan 1 00:00:00 1970

New Privacy Key  浏览

Upload

This page is used to upload a new SSL certificate and privacy key.

*NOTE: Please check the current BMC time in NTP under the Configuration menu while uploading the SSL certificate.*

### Current Certificate

The current certificate, uploaded date/time information will be displayed (read only).

### New Certificate

Browse and navigate the certificate file.

- The certificate file should be of pem type

### Current Privacy Key

The current privacy key, uploaded date/time information will be displayed (read only).

### New Privacy Key

Browse and navigate the privacy key file.

- The privacy key file should be of pem type

### Upload

Click 'upload' to upload the SSL certificate and privacy key into the BMC.

*NOTE: Upon successful upload, HTTPs service will be restarted to use the newly uploaded SSL certificate.*

## 2.5.18 System and Audit Log Settings

The screenshot shows the 'System and Audit Log Settings' page in the ASRock Rack American Megatrends BIOS/UEFI interface. The page has a blue header with the ASRock Rack logo and the American Megatrends logo. Below the header is a navigation bar with links: Dashboard, FRU Information, Server Health, Configuration, Remote Control, Auto Video Recording, Maintenance, Firmware Update, and HELP. The 'Configuration' link is highlighted. The main content area is titled 'System and Audit Log Settings' and contains a sub-header: 'Enable and configure logging of system events below. Or you can enable/disable logging of audit events. Press the Save button to save your changes.' The settings are organized into two sections: 'System Log' and 'Audit Log'. The 'System Log' section includes: 'System Log' (checked 'Enable'), 'Log Type' (radio buttons for 'Local Log' and 'Remote Log', with 'Local Log' selected), 'File Size (in bytes)' (text input field with '50000'), 'Rotate Count' (text input field with '0'), 'Server Address' (text input field), and 'Audit Log' (checked 'Enable'). At the bottom right of the form are 'Save' and 'Reset' buttons.

|                      |                                                                             |
|----------------------|-----------------------------------------------------------------------------|
| System Log           | <input checked="" type="checkbox"/> Enable                                  |
| Log Type             | <input checked="" type="radio"/> Local Log <input type="radio"/> Remote Log |
| File Size (in bytes) | <input type="text" value="50000"/>                                          |
| Rotate Count         | <input type="text" value="0"/>                                              |
| Server Address       | <input type="text"/>                                                        |
| Audit Log            | <input checked="" type="checkbox"/> Enable                                  |

Save Reset

This page is used to configure the System and Audit log settings.

### System Log

Check the option 'Enable' to enable system logs.

### Log Type

Select the Log type for system logs, whether it should be preserved in a local file or on a remote server. Local file resides at `/var/log/`.

### File Size

If Local log is selected, specify the size of the file in bytes.

- Size ranges from 3 to 65535.

### Rotate Count

When logged information exceeds the specified file size, the old log information automatically gets moved to backup files based on the rotate count value. If the rotate count is zero, the old log information gets cleared permanently each time.

- Value ranges from 0 to 255.

### Server Address

Specify the remote server address to log system events. The server address will support the following:

- IP Address (Both IPv4 and IPv6 format).
- FQDN (Fully qualified domain name) format.

---

### **Audit Log**

Check the option 'Enable' to enable audit log.

### **Save**

Click 'Save' to save the configured settings.

### **Reset**

Click 'Reset' to reset to the previously saved values.

## 2.5.19 User Management

**ASRock Rack** American Megatrends

admin (Administrator) Refresh Print Logout

Dashboard FRU Information Server Health Configuration Remote Control Auto Video Recording Maintenance Firmware Update HELP

### User Management

The list below shows the current list of available users. To delete or modify a user, select their name in the list and press "Delete User" or "Modify User". To add a new user, select an unconfigured slot and press "Add User".

Number of configured users: 2

| UserID | Username  | User Access | Network Privilege | Email ID |
|--------|-----------|-------------|-------------------|----------|
| 1      | anonymous | Disabled    | Administrator     | ~        |
| 2      | admin     | Enabled     | Administrator     | ~        |
| 3      | ~         | ~           | ~                 | ~        |
| 4      | ~         | ~           | ~                 | ~        |
| 5      | ~         | ~           | ~                 | ~        |
| 6      | ~         | ~           | ~                 | ~        |
| 7      | ~         | ~           | ~                 | ~        |
| 8      | ~         | ~           | ~                 | ~        |
| 9      | ~         | ~           | ~                 | ~        |
| 10     | ~         | ~           | ~                 | ~        |

Add User Modify User Delete User

The displayed table shows any configured Users and available slots. You can modify or add new users from here. A maximum of 10 slots are available, including the default admin and anonymous. It is advised that the anonymous user's privilege and password should be modified as a security measure. To view the page, you must have Operator privileges. To modify or add a user, You must have Administrator privileges.

*NOTE: Free slots are denoted by "~" in all columns for the slot.*

### Add User

Select a free slot and click 'Add User' to add a new user to the device. Alternatively, double click on a free slot to add a user.

### Modify User

Select a configured slot and click 'Modify User' to modify that user. Alternatively, double click on the configured slot.

### Delete User

Select the desired user to be deleted and click 'Delete User'.

---

## 2.5.20 Virtual Media Devices

The screenshot shows the ASRock Rack American Megatrends BIOS interface. The top navigation bar includes links for Dashboard, FRU Information, Server Health, Configuration, Remote Control, Auto Video Recording, Maintenance, Firmware Update, and HELP. The 'Configuration' tab is selected. The main heading is 'Virtual Media Devices'. Below it, a note states: 'The following option will allow to configure virtual media devices.' The configuration options are: 'Floppy devices' (dropdown menu set to 1), 'CD/DVD devices' (dropdown menu set to 1), 'Harddisk devices' (dropdown menu set to 1), and 'SD Media Support' (checkbox checked, labeled 'Enable'). At the bottom right, there are 'Save' and 'Reset' buttons.

Use this page to configure Virtual Media device settings.

### Floppy devices

Select the number of floppy devices that support Virtual Media redirection.

### CD/DVD devices

Select the number of CD/DVD devices that support Virtual Media redirection.

### Hard disk devices

Select the number of hard disk devices that support Virtual Media redirection.

### SD Media Support

Check this option to enable SD Media support in BMC.

### Save

Click 'Save' to save the configured settings.

### Reset

Click 'Reset' to reset the previously-saved values.

---

## 2.6 Remote Control

### 2.6.1 Console Redirection



Launch the remote console redirection window from this page. To launch it, you must have Administrator privileges.

*NOTE: A compatible JRE must be installed in the system prior to the launch of the JNLP file.*

#### Java Console

Click 'Java Console' which will cause the `jviewer.jnlp` file to be downloaded. Once the file is downloaded and launched, a Java redirection window will be displayed.

## 2.6.2 Power Control and Status

The screenshot shows the ASRock Rack American Megatrends BIOS/UEFI interface. The top navigation bar includes links for Dashboard, FRU Information, Server Health, Configuration, Remote Control, Auto Video Recording, Maintenance, Firmware Update, and HELP. The main title is "Power Control and Status". Below the title, a message states: "The current server power status is shown below. To perform a power control operation, select one of the options below and press 'Perform Action'." The status "Host is currently on" is displayed in green. A list of power control options is shown, each with a radio button: "Reset Server" (selected), "Power Off Server - Immediate", "Power Off Server - Orderly Shutdown", "Power On Server", and "Power Cycle Server". A "Perform Action" button is located at the bottom right of the form.

This page helps you to view or perform any host power cycle operations.

### Reset Server

Select this option to reboot the system without powering off (warm boot).

### Power Off Server - Immediate

Select this option to immediately power off the server.

### Power Off Server - Orderly Shutdown

Select this option to initiate operating system shutdown prior to the shutdown.

### Power On Server

Select this option to power on the server.

### Power Cycle Server

Select this option to first power off, and then reboot the system (cold boot).

### Perform Action

Click 'Perform Action' to perform the selected option.

---

## 2.6.3 Java SOL



Launch the Java SOL, you must have Administrator privileges.

*NOTE: A compatible JRE must be installed in the system prior to the launch of the JNLP file.*

## 2.7 Auto Video Recording

### 2.7.1 Triggers Configuration

**ASRock Rack** American Megatrends

Dashboard FRU Information Server Health Configuration Remote Control Auto Video Recording Maintenance Firmware Update admin (Administrator) Refresh Print Logout HELP

### Triggers Configuration

This page allows the user to configure which events will trigger the auto video recording function of the KVM server

|                                                                     |                                                                  |
|---------------------------------------------------------------------|------------------------------------------------------------------|
| <input type="checkbox"/> Temperature/Voltage Critical Events        | <input type="checkbox"/> Temperature/Voltage Non Critical Events |
| <input type="checkbox"/> Temperature/Voltage Non Recoverable Events | <input type="checkbox"/> Fan state changed Events                |
| <input type="checkbox"/> Watchdog Timer Events                      | <input type="checkbox"/> Chassis Power on Event                  |
| <input type="checkbox"/> Chassis Power off Event                    | <input type="checkbox"/> Chassis Reset Event                     |
| <input type="checkbox"/> Particular Date and Time Event             | <input type="checkbox"/> LPC Reset Event                         |

Date:

Time: (hh:mm:ss)

Configure which events on the page will trigger the auto-video recording option to start.

*NOTE: Maximum of 2 video files can be recorded in BMC.*

#### Event List

You can check/uncheck a box to add/remove that trigger for your system.

#### Save

Click 'Save' to save any changes made.

*NOTE: KVM service should be enabled (under 'Configuration -> Services') to perform auto-video recording.*

#### Reset

Click 'Reset' to reset the modified changes.

## 2.7.2 Video Recording

ASRock Rack American Megatrends

admin (Administrator) Refresh Print Logout

Dashboard FRU Information Server Health Configuration Remote Control Auto Video Recording Maintenance Firmware Update HELP

### Video Recording

Below is a list of available recorded video files on the BMC. Select a video and press the "Play Video" button to play the video. Select a video and press the "Download" button to download and save the video. Press the "Delete" button to delete the selected video.

Number of available Video files : 0

| #                  | File Name | File Information |
|--------------------|-----------|------------------|
| Data Not Available |           |                  |

Play Video Download Delete

This page displays the list of available recorded video files on the BMC. The various fields of Recorded Video are given below:

# : The serial number.

File Name : The video filename.

File Information : Day, date and time of video upload.

*NOTE: A maximum of 2 video files can be recorded in BMC.*

### Play Video

Select a video and click the Play Video button to play the video file in the Java Application.

### Download

Select a video and click the Download button to download and save the video file in the client machine. The video will be downloaded in (.avi) format.

### Delete

Click the Delete button to delete the selected video file.

## 2.8 Maintenance

### 2.8.1 Preserve Configuration



DashboardFRU InformationServer HealthConfigurationRemote ControlAuto Video RecordingMaintenanceFirmware Updateadmin (Administrator)RefreshPrintLogoutHELP

#### Preserve Configuration

This page allows the user to configure the preserve configuration items, which will be used by the Restore factory defaults to preserve the existing configuration without overwriting with default configuration.

Click here to go to [Firmware Update](#) or [Restore Factory Defaults](#)

Number of Preserved Items: 0

| #  | Preserve Configuration Item | Preserve Status          |
|----|-----------------------------|--------------------------|
| 1  | SDR                         | <input type="checkbox"/> |
| 2  | FRU                         | <input type="checkbox"/> |
| 3  | SEL                         | <input type="checkbox"/> |
| 4  | IPMI                        | <input type="checkbox"/> |
| 5  | Network                     | <input type="checkbox"/> |
| 6  | NTP                         | <input type="checkbox"/> |
| 7  | SNMP                        | <input type="checkbox"/> |
| 8  | SSH                         | <input type="checkbox"/> |
| 9  | KVM                         | <input type="checkbox"/> |
| 10 | Authentication              | <input type="checkbox"/> |

Check AllUncheck AllSaveReset

Check which configurations need to be preserved, while Restore Factory Defaults is done.

#### Configuration list

You can either check/uncheck a check box to preserve/overwrite the configurations for your system.

#### Check All

Click this button to check the whole configuration list.

#### Uncheck All

Click this button to uncheck the whole configuration list.

#### Save

Click 'Save' to save any changes made.

*NOTE: This configuration is used by the Restore Factory Defaults process.*

#### Reset

Click 'Reset' to reset the modified changes.

## 2.8.2 Restore Factory Defaults





DashboardFRU InformationServer HealthConfigurationRemote ControlAuto Video RecordingMaintenanceFirmware UpdateHELP

admin (Administrator)RefreshPrintLogout

### Restore Factory Defaults

This page will restore the device to default configuration. Press "Restore Factory Defaults" to restore the device default configuration.

**WARNING:** Please note that after entering into restore factory defaults, widgets, other web pages and services will not work. All open widgets will be closed automatically. The device will reset and reboot within few minutes.

This section lists the configuration items, that will be preserved during restore factory default configuration. Click "Preserve Configuration" to modify the preserve configuration items.

| #                  | Preserve Configuration Item | Preserve Status |
|--------------------|-----------------------------|-----------------|
| Data Not Available |                             |                 |

Enter Preserve ConfigurationRestore Factory Defaults

This page helps to restore the factory defaults of the device. Please note that after entering restore factory widgets, other web pages and services will not work. All open widgets will be closed automatically. The device will reset and reboot within a few minutes.

### Preserve Configuration

Click this to redirect to Preserve configuration page, which is used to preserve the particular configurations not to be overwritten by the default configuration.

### Restore Factory Defaults

Click this to restore the firmware with default configurations.

## 2.8.3 System Administrator

**System Administrator**

This page allows the user to enable/disable access and change the password for the System Administrator account.

Username:

User Access: ☒ Enable ☐ Change Password

Password:

Confirm Password:

This page is used to configure the System Administrator configurations.

### Username

Username of the System Administrator is displayed (read only).

### User Access

Check this option to enable user access for the system administrator.

### Change Password

To change the user's password, check the 'Change Password' option. This will enable the password fields.

### Password, Confirm Password

Enter and confirm the new password here.

- Passwords must be at least 8 characters long.
- Space is not allowed.

*NOTE: This field will not allow more than 64 characters.*

### Save

Click 'Save' to save the new configuration for the system administrator.

### Reset

Click 'Reset' to reset the modified changes.

# 2.9 Firmware Update

## 2.9.1 Firmware Update



DashboardFRU InformationServer HealthConfigurationRemote ControlAuto Video RecordingMaintenanceFirmware UpdateHELP

### Firmware Update

Upgrade firmware of the device. Press "Enter Update Mode" to put the device in update mode.

The protocol information to be used for firmware image transfer during this update is as follows. To configure, choose 'Image Transfer Protocol' under Configuration menu.  
Protocol Type : HTTP/HTTPS

**WARNING:** Please note that after entering update mode widgets, other web pages and services will not work. All open widgets will be closed automatically. If upgrade process is cancelled in the middle of the wizard, the device will reset.

☐ Preserve all Configuration. This will preserve all the configuration settings during the firmware update - irrespective of the individual items marked as preserve/overwrite in the table below. All configuration items below will be preserved by default during a restore factory default operation. Click "Enter Preserve Configuration" to modify the Preserve status settings.

| #  | Preserve Configuration Item | Preserve Status |
|----|-----------------------------|-----------------|
| 1  | SDR                         | Overwrite       |
| 2  | FRU                         | Overwrite       |
| 3  | SEL                         | Overwrite       |
| 4  | IPMI                        | Overwrite       |
| 5  | Network                     | Overwrite       |
| 6  | NTP                         | Overwrite       |
| 7  | SNMP                        | Overwrite       |
| 8  | SSH                         | Overwrite       |
| 9  | KVM                         | Overwrite       |
| 10 | Authentication              | Overwrite       |

Enter Preserve ConfigurationEnter Update Mode

This wizard takes you through the process of firmware upgrades. A reset of the box will automatically follow whether the upgrade is completed or cancelled. An option to Preserve configuration will be presented. Enable the option, if you wish to preserve configured settings through the upgrade.


### Enter Preserve Configuration

Click this to redirect to the Preserve configuration page, which is used to preserve the particular configurations not to be overwritten by the default configuration.

### Enter Update Mode

Click 'Enter Update Mode' to upgrade the current device firmware.

## 2.9.2 Image Transfer Protocol

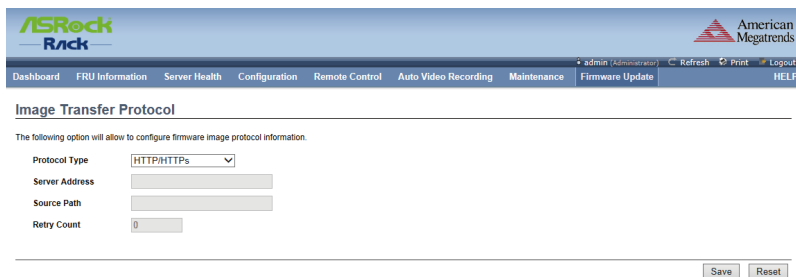

The screenshot shows the ASRock Rack BIOS/UEFI interface. The top navigation bar includes links for Dashboard, FRU Information, Server Health, Configuration, Remote Control, Auto Video Recording, Maintenance, Firmware Update, and HELP. The 'Image Transfer Protocol' page is active, displaying a configuration form. The form includes a 'Protocol Type' dropdown menu set to 'HTTP/HTTPS', and input fields for 'Server Address', 'Source Path', and 'Retry Count' (set to 0). A 'Save' button and a 'Reset' button are located at the bottom right of the form.

**Image Transfer Protocol**

The following option will allow to configure firmware image protocol information.

Protocol Type:

Server Address:

Source Path:

Retry Count:

This page is used to configure the firmware image protocol information.

### Protocol Type

Protocol type to transfer the firmware image into the BMC.

### Server Address

The Server IP address of the firmware image is stored.

- An IP Address is made of 4 numbers separated by dots as in "xxx.xxx.xxx.xxx".
- Each number ranges from 0 to 255.
- The first number must not be 0.

### Source Path

Full Source path with filename of where the firmware image is stored.

### Retry Count

Number of time(s) to be retried when transfer failure occurs. Retry count ranges from 0 to 255.

### Save

Click 'Save' to save the configured settings.

### Reset

Click 'Reset' to reset the modified changes.