


iBOX-155

Quick Installation Guide


Inside View

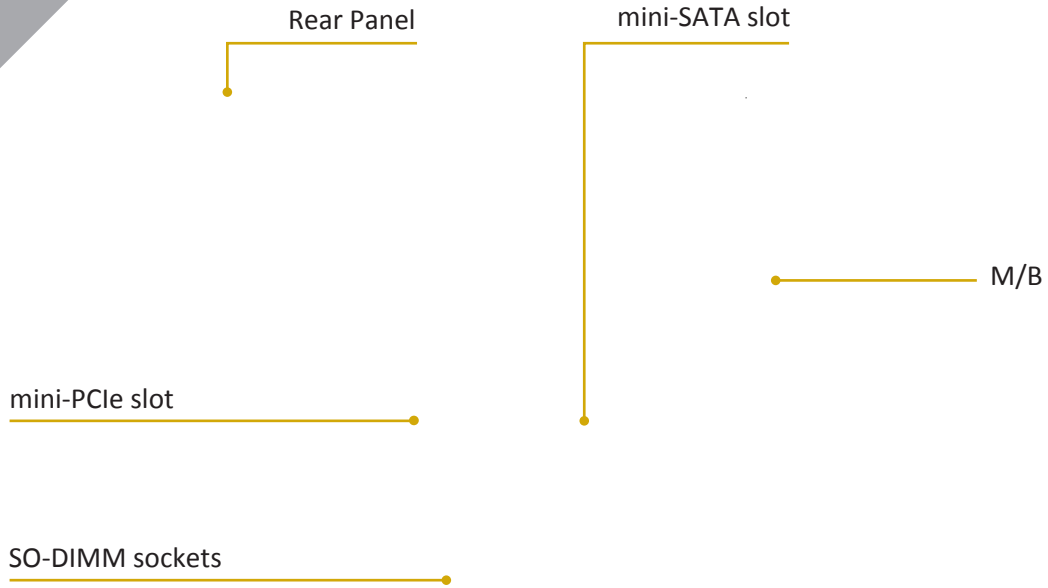

Front View



Rear View

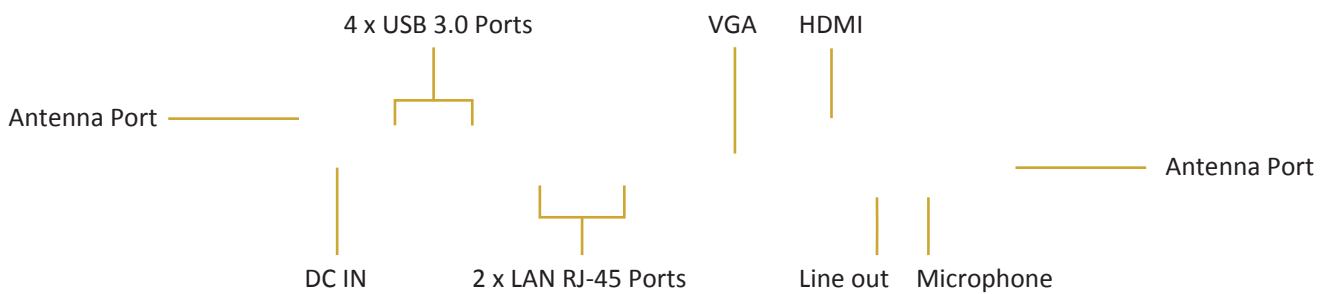



1. Removing the Top Cover

1. Remove the six screws on the front and rear panels.



2. Lift up and remove the top cover.

2. Installing the SO-DIMM

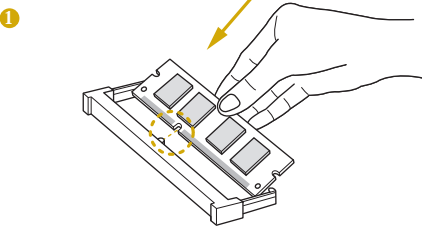

* Please install the SO-DIMM module into the DDR3_A2 for the first priority.

3. Installing the Hard Drive

1. Release the four screws to remove the hard drive bracket.



2. Place a HDD into the bracket with the printed circuit board side facing down. Secure the hard drive into the place using the four screws.



3. Place the bracket into the chassis. Carefully align the mounting holes on the bracket and the chassis. Secure the bracket into the place using the four screws.

4. Attach the SATA data cable and power cable to the motherboard.



4. Installing the WiFi module

* This step is optional.

1. Based on the length of the WiFi Module Card, release and move the stand-off by hand to the nut to be used.



2. Insert the WiFi Module Card into the mini PCI Express slot (MINI_PCIE1). Tighten the screw that holds the card in place.



5. Installing the WiFi antennas

* This step is optional.

1. Attach the SMA Wi-Fi Antenna Cables to the WiFi Module.



2. Connect the two WiFi 2.4/5 GHz Antennas to the antenna connectors. Turn the antenna clockwise until it is securely connected.



3. Set the WiFi 2.4/5 GHz Antenna at 90-degree angle.

* You may need to adjust the direction of the antenna for a stronger signal.

6. Replacing the Bottom Cover

1. Replace the top cover.



2. Secure the six screws on the front and rear panels.

For more details on the hardware installation, please refer to the User Manual in the support CD.

The terms HDMI™ and HDMI High-Definition Multimedia Interface, and the HDMI logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.

